

# OTA Product Catalog

Shield Box	MA8161A
RF Chamber	MA8171A
CATR Anechoic Chamber	MA8172A
CATR Anechoic Chamber 2	MA8172B





# OTA Products



# for 5G NR DUT Tests

5 G network testing is not the same as testing 4G architectures, or any other previous wireless network type.

Traditionally, network engineers confirm base transceiver stations (BTS) and antennas are functioning properly and transmitting the design signal strength by connecting test instruments using a coaxial cable to the base station RF connector.

However, new 5G services use the sub-6 GHz and mmWave bands, and 3GPP recommends using over-the-air (OTA) call connections to test the mmWave band, requiring an OTA RF chamber for stable measurement.

Anritsu's reasonably priced OTA products support this wide frequency band with easy setup for shorter test times.

\*DUT=Device under test



## Anritsu OTA Products Features

### Wide Product Line Supporting Function to 3GPP Conformance Tests

#### MA8161A Shield Box

Supports simple OTA test environment for 5G/LTE protocol R&D tests, PCT/CAT pre-tests, etc.

- Small footprint for easy benchtop use and good handling
- Regression testing, etc., for 5G UE development stage
- Supports both sub-6 GHz and mmWave bands



#### MA8171A RF Chamber

Supports OTA environment for integrated RF/protocol tests, such as 5G NR mmWave beamforming management tests, etc.

- For development of 5G NR chipsets and devices as well as UE mmWave development
- Supports 5G NR mmWave RF ERP/TIRP measurements, etc.
- Both 5G NR Standalone (SA) and Non-standalone (NSA) modes



#### MA8172A CATR Anechoic Chamber/ MA8172B CATR Anechoic Chamber 2

Supports 5G NR OTA environment using 3GPP-compliant Compact Antenna Test Range (CATR) method

- For mmWave development of 5G NR chipsets and devices, and UE conformance tests
- Supports 5G NR mmWave spurious tests
- Three component parts for easy transport and quick setup
- MA8172A can be upgraded to MA8172B at customer on site
- Supports 2 AoA (Angle of Arrival) with MA8172B



## Anritsu OTA Products Layout

### Shield Box MA8161A

Front



Rear




- 1** SMA (f) connector × 8
- 2** Through hole × 2
- 3** Ventilation hole × 2
- 4** K (f) connector × 8

\* Example selecting MA8161A-002

# Anritsu OTA Products Layout

## RF Chamber MA8171A

### Setup Example

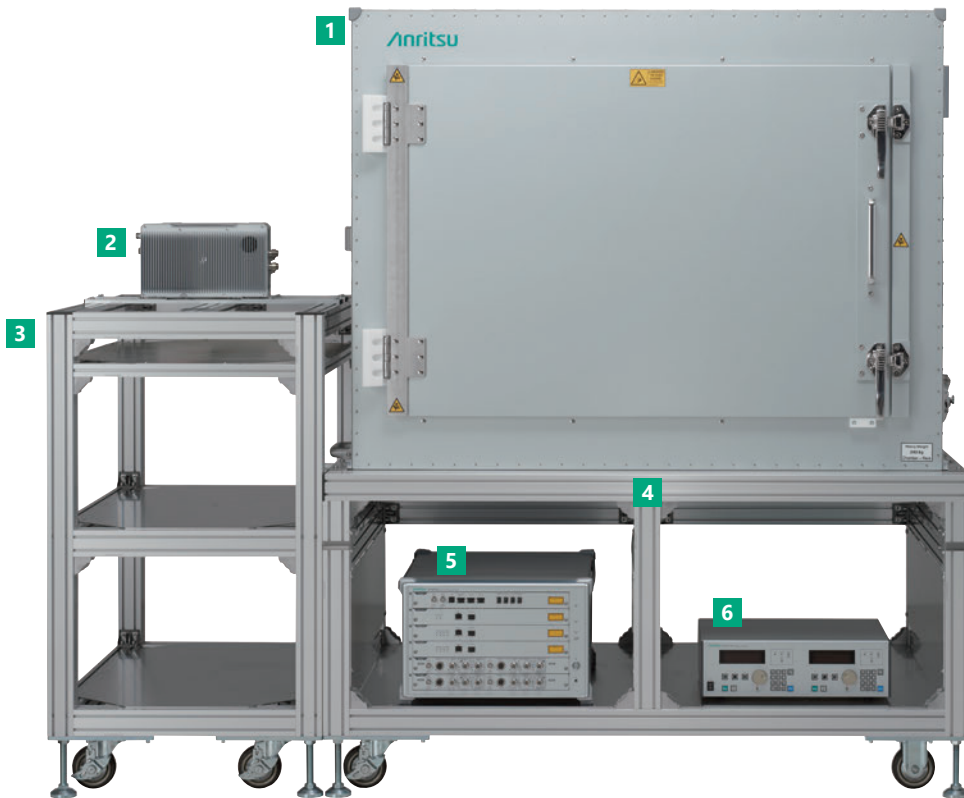

- 1** RF Chamber MA8171A
- 2** 28 GHz RF Converter MA80001A/  
39 GHz RF Converter MA80002A
- 3** Converter Rack B0747A
- 4** Chamber Rack B0746A
- 5** Radio Communication Test Station MT8000A
- 6** Position Controller MA8174A

### Door Opening



- 7** Test Antenna
- 8** Positioner MA8175A

# Anritsu OTA Products Layout


## CATR Anechoic Chamber MA8172A

### Front



- 1 Door
- 2 Sealing handles
- 3 Handle
- 4 Ventilation hole
- 5 Position Controller MA8178A

### Enlarged View

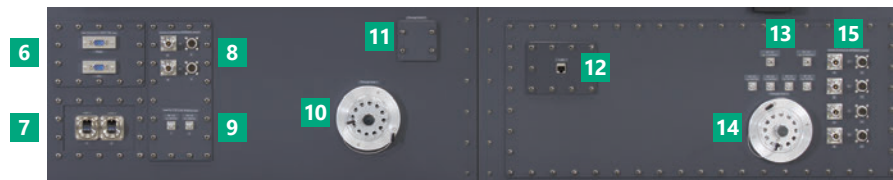





- 6 Connect to MA8178A (Theta/Phi)
- 7 USB3.0
- 8 Connect to MT8000A (5, 6)
- 9 For LTE Link Antenna
- 10 Through Hole 1
- 11 Through Hole 2
- 12 LAN
- 13 RF I/O
- 14 Through Hole 3
- 15 Connect to MT8000A (1, 2, 3, 4)



# Anritsu OTA Products Layout

## CATR Anechoic Chamber MA8172A (continued)

### Insides

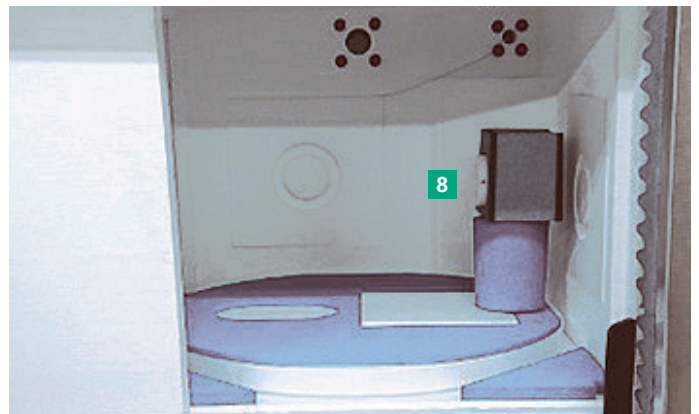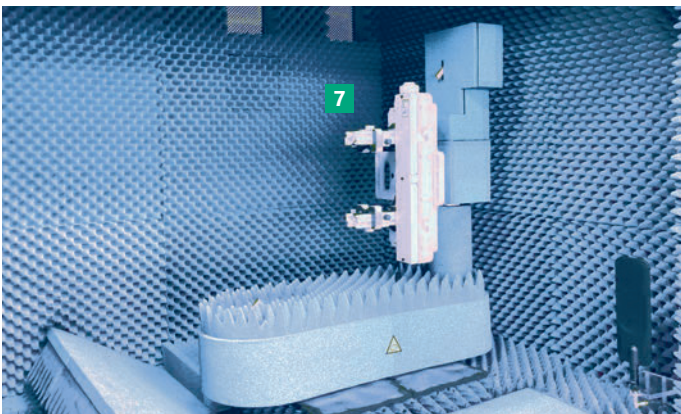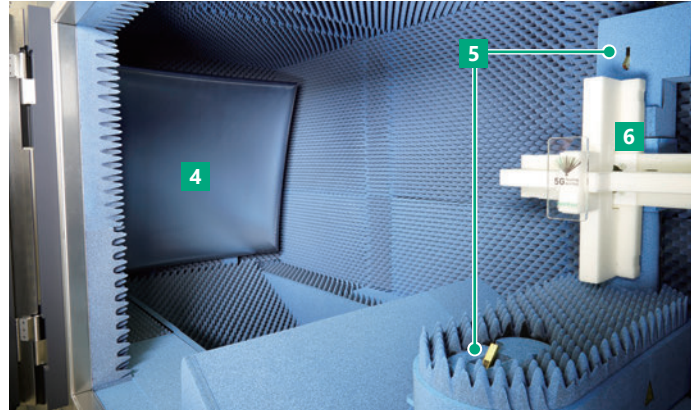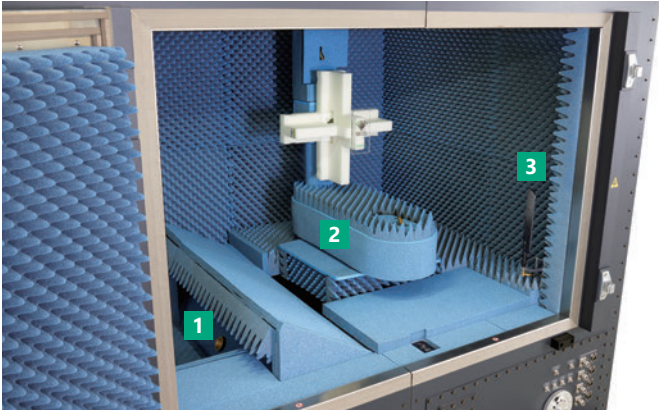

- 1 Feed antenna
- 2 Positioner MA8179A
- 3 LTE Link Antenna Kit MA8172A-AK023
- 4 Reflector

- 5 NR FR2 Link Antenna Kit MA8172A-AK022
- 6 DUT-supporting structure MA8179A-AK010
- 7 DUT Holder MA8179A-AK011
- 8 Temperature Testing Option MA8172A-010

### Rear



- 1 Ventilation hole
- 2 Fans

# Anritsu OTA Products Specifications

## Shield Box MA8161A

### Shield Box MA8161A

Electrical Characteristics	Shielding characteristics: without cable connection via USB connector or Through Hole ≥50 dB (600 MHz ≤ frequency ≤ 6 GHz) ≥50 dB (24 GHz < frequency ≤ 43.5 GHz) (nom.)	
Input/Output Connector	When Connector Panel 1 MA8161A-001 is selected SMA (f) — SMA (f): 2 K (f) — K (f): 2 USB 3.0 Type-A (f) — USB 3.0 Type-A (f): 1 When Connector Panel 2 MA8161A-002 is selected SMA (f) — SMA (f): 8 K (f) — K (f): 8 Through Hole: 2	
Dimensions and Mass	Outer dimensions: 434 (W) × 271 (H) × 328 (D) mm (excluding projections) Mass: ≤16 kg (Full option configuration) Maximum test UE size: 300 (W) × 50 (H) × 200 (D) mm (set the UE antenna face down) Maximum test UE mass: ≤1 kg Ventilation hole: 2	
Environmental Conditions	Operating temperature range: +5°C to +40°C Storage temperature range: -20°C to +60°C (without condensation)	
CE	RoHS	2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018
UKCA	RoHS	S.I. 2012 No.3032, EN IEC 63000: 2018



# Anritsu OTA Products Specifications

## RF Chamber MA8171A

### RF Chamber MA8171A

Electrical Characteristics	Shielding characteristics $\geq 70$ dB (800 MHz $\leq$ frequency $\leq$ 3.8 GHz) (nom.) $\geq 60$ dB (24 GHz $\leq$ frequency $\leq$ 40 GHz) (nom.) Anechoic performance Reflected wave Level by free space standing wave ratio method in QZ (quiet zone) in $\phi$ 300 mm sphere $\geq 30$ dB (24 GHz $\leq$ frequency $\leq$ 40 GHz) (nom.)	
General	External Interface RF connection: K (f) $\times$ 2 SMA (f) $\times$ 4 UE connection: USB 2.0 (type-A) (f) $\times$ 2 Position Controller: mini D-Sub 15 pin (m) $\times$ 2 Internal interface RF connection: K (f) $\times$ 2 SMA (f) $\times$ 4 UE connection: USB 2.0 (type-A) (f) $\times$ 2 Positioner connection: mini D-Sub 15 pin (f) $\times$ 2 Through sleeve pipe: 1 ( $\phi$ 50 mm) Door: Unilateral door (left side opening) Outside door size: 1100 (W) $\times$ 800 (H) mm Aperture: 1000 (W) $\times$ 700 (H) mm Blank panel: 6 Ventilation hole: 2	
Dimensions and Mass	Outer dimensions: 1460 (W) $\times$ 1210 (H) $\times$ 1000 (D) mm (excluding projections) Effective inner dimension: 1100 (W) $\times$ 800 (H) $\times$ 650 (D) mm (Inside dimension with radio wave absorber stuck) Mass: $\leq$ 150 kg Outer dimensions (with chamber rack): 1460 (W) $\times$ 1785 (H) $\times$ 1000 (D) mm (including casters, excluding projections) Mass (with chamber rack): $\leq$ 240 kg	
CE	RoHS	2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018
UKCA	RoHS	S.I. 2012 No.3032, EN IEC 63000: 2018


### Position Controller MA8174A

External Interface	GPIO Trigger output: BNC (5 V, TTL, negative logic, pulse width 20 $\mu$ s) $\times$ 1 Control connector: mini D-Sub 15 pin (f) $\times$ 2	
Dimensions and Mass	Dimensions: 434 (W) $\times$ 141 (H) $\times$ 363 (D) mm Mass: $\leq$ 15 kg Rated voltage: 100 VAC to 120 VAC/200 VAC to 240 VAC Rated frequency: 50 Hz to 60 Hz Power consumption: $\leq$ 110 VA (when Positioner MA8175A connected)	
Environmental Conditions	Operating temperature range: +5°C to +40°C (without condensation) Operating humidity range: $\leq$ 85% (without condensation) Storage temperature range: -20°C to +60°C (without condensation) Storage humidity range: $\leq$ 85% (without condensation)	
CE	EMC	2014/30/EU, EN61326-1, EN61000-3-2
	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018
UKCA	EMC	S.I. 2016 No.1091, EN 61326-1, EN61000-3-2
	LVD	S.I. 2016 No.1101, EN 61010-1
	RoHS	S.I. 2012 No.3032, EN IEC 63000: 2018

# Anritsu OTA Products Specifications

## RF Chamber MA8171A (continued)

### Positioner MA8175A

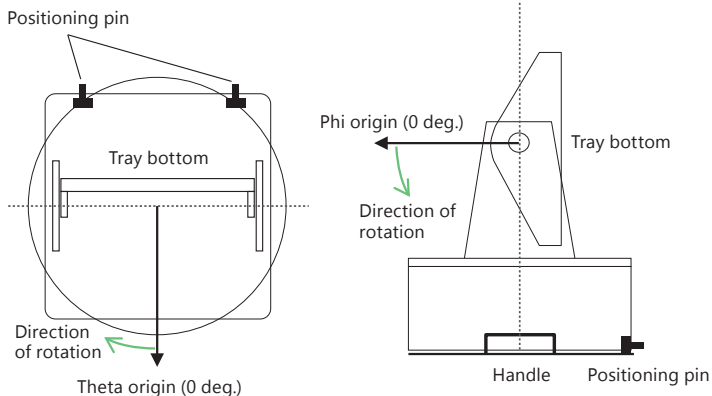General	<p>Axis of rotation: 2 (Theta: Horizontal rotation, Phi: Vertical rotation)            Rotational speed: 1.0 rpm to 15.0 rpm, 0.1 rpm step (nom.)            Rotation angle resolution (Setting resolution): 0.1 deg. (nom.)            Stop precision (Reproducibility): Specified stopping precision reproducibility when the center of gravity of UE of 1 kg or less is at rotation center</p> <p>Theta: <math>\pm 0.5</math> deg. (nom.)            Phi: <math>\pm 0.5</math> deg. (nom.)</p> <p>Angle of rotation            Theta: <math>-20.0</math> deg. to <math>380.0</math> deg. (finite rotation)            Phi: <math>0.0</math> to <math>359.9</math> deg. (infinite rotation), <math>-720.0</math> deg. to <math>720.0</math> deg. (finite rotation)</p> <p>Angle origin            Theta: According to figure below (left)            Phi: According to figure below (right)</p>  <p>Allowable torque: <math>10 \text{ N} \cdot \text{m}</math> (nom.)            UE allowable size: Tray size within <math>400 \times 400</math> mm, 200 mm or less from the bottom of the tray            UE allowable mass: 1 kg            Noise: <math>\leq 70</math> dB (Conforms to Machinery Directive 2006/42/EC Annex I)</p>								
External Connector	<p>Theta: mini D-Sub 15 pin connector (m), 0.8 m from the end of the positioner body            Phi: mini D-Sub 15 pin connector (m), 0.8 m from the end of the positioner body</p>								
Dimensions and Mass Power Supply	<p>Dimensions: <math>600</math> (W) <math>\times</math> <math>715</math> (H) <math>\times</math> <math>600</math> (D) mm (excluding projections and cable)            Tray size: <math>400</math> (W) <math>\times</math> <math>400</math> (D) mm (excluding projections and screw)                          <math>70</math> (depth) mm (from the center of rotation to the bottom of the tray)            Mass: <math>\leq 25</math> kg            Power: Supplied from Position Controller MA8174A</p>								
Environmental Conditions	<p>Operating temperature range: <math>+5^\circ\text{C}</math> to <math>+40^\circ\text{C}</math> (without condensation)            Operating humidity range: <math>\leq 85\%</math> (without condensation)            Storage temperature range: <math>-20^\circ\text{C}</math> to <math>+60^\circ\text{C}</math> (without condensation)            Storage humidity range: <math>\leq 85\%</math> (without condensation)</p>								
CE	<table border="1"> <tr> <td data-bbox="239 1465 395 1501">EMC</td> <td data-bbox="395 1465 1508 1501">2014/30/EU, EN61326-1, EN61000-3-2</td> </tr> <tr> <td data-bbox="239 1501 395 1537">LVD</td> <td data-bbox="395 1501 1508 1537">2014/35/EU, EN61010-1</td> </tr> <tr> <td data-bbox="239 1537 395 1572">RoHS</td> <td data-bbox="395 1537 1508 1572">2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018</td> </tr> <tr> <td data-bbox="239 1572 395 1600">Machinery</td> <td data-bbox="395 1572 1508 1600">2006/42/EC, EN60204-1</td> </tr> </table>	EMC	2014/30/EU, EN61326-1, EN61000-3-2	LVD	2014/35/EU, EN61010-1	RoHS	2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018	Machinery	2006/42/EC, EN60204-1
EMC	2014/30/EU, EN61326-1, EN61000-3-2								
LVD	2014/35/EU, EN61010-1								
RoHS	2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018								
Machinery	2006/42/EC, EN60204-1								
UKCA	<table border="1"> <tr> <td data-bbox="239 1600 395 1635">EMC</td> <td data-bbox="395 1600 1508 1635">S.I. 2016 No.1091, EN 61326-1, EN61000-3-2</td> </tr> <tr> <td data-bbox="239 1635 395 1671">LVD</td> <td data-bbox="395 1635 1508 1671">S.I. 2016 No.1101, EN 61010-1</td> </tr> <tr> <td data-bbox="239 1671 395 1698">RoHS</td> <td data-bbox="395 1671 1508 1698">S.I. 2012 No.3032, EN IEC 63000: 2018</td> </tr> </table>	EMC	S.I. 2016 No.1091, EN 61326-1, EN61000-3-2	LVD	S.I. 2016 No.1101, EN 61010-1	RoHS	S.I. 2012 No.3032, EN IEC 63000: 2018		
EMC	S.I. 2016 No.1091, EN 61326-1, EN61000-3-2								
LVD	S.I. 2016 No.1101, EN 61010-1								
RoHS	S.I. 2012 No.3032, EN IEC 63000: 2018								

## CATR Anechoic Chamber MA8172A

**CATR Anechoic Chamber MA8172A**  
**Spurious Measurement Kit 6 GHz-87 GHz MA8172A-003/-005**  
**Temperature Testing Option MA8172A-010**  
**Test Antenna MA8172A-021/-022/-023**  
**Second Antenna MA8172A-033**

Electrical Characteristics	<p>Shielding characteristics: without cable connection via USB connector or Through Hole  <math>\geq 60</math> dB (1 GHz <math>\leq</math> frequency <math>\leq</math> 6 GHz)  <math>\geq 60</math> dB (600 MHz <math>\leq</math> frequency <math>&lt;</math> 1 GHz, 6 GHz <math>&lt;</math> frequency <math>\leq</math> 87 GHz) (nom.)</p> <p>Quiet Zone  MA8179A: Specifies the flatness of the electric field amplitude and phase within a cylindrical area (QZ: quiet zone) with a diameter of 330 mm and a depth of 330 mm.  MA8179B: Specifies the flatness of the electric field amplitude and phase within a cylindrical area (QZ: quiet zone) with a diameter of 400 mm and a depth of 400 mm.</p> <p>Amplitude taper  MA8172A-021: <math>\leq 1.5</math> dB (23.4 GHz <math>\leq</math> frequency <math>\leq</math> 42 GHz) (nom.) (MA8179A)  <math>\leq 2.0</math> dB (23.4 GHz <math>\leq</math> frequency <math>\leq</math> 42 GHz) (nom.) (MA8179B)  MA8172A-022/-023: <math>\leq 1.5</math> dB (22.65 GHz <math>\leq</math> frequency <math>\leq</math> 32.125 GHz) (nom.) (MA8179A)  <math>\leq 1.7</math> dB (32.125 GHz <math>&lt;</math> frequency <math>\leq</math> 45.1 GHz) (nom.) (MA8179A)  <math>\leq 2.2</math> dB (22.65 GHz <math>\leq</math> frequency <math>\leq</math> 32.125 GHz) (nom.) (MA8179B)  <math>\leq 2.4</math> dB (32.125 GHz <math>&lt;</math> frequency <math>\leq</math> 45.1 GHz) (nom.) (MA8179B)  MA8172A-033: <math>\leq 1.5</math> dB (22.65 GHz <math>\leq</math> frequency <math>\leq</math> 32.125 GHz) (nom.) (MA8179A)  <math>\leq 1.7</math> dB (32.125 GHz <math>&lt;</math> frequency <math>\leq</math> 49.8 GHz) (nom.) (MA8179A)  <math>\leq 2.2</math> dB (22.65 GHz <math>\leq</math> frequency <math>\leq</math> 32.125 GHz) (nom.) (MA8179B)  <math>\leq 2.4</math> dB (32.125 GHz <math>&lt;</math> frequency <math>\leq</math> 49.8 GHz) (nom.) (MA8179B)  MA8172A-003/-005: <math>\leq 3</math> dB (6 GHz <math>\leq</math> frequency <math>\leq</math> 20 GHz) (nom.) (MA8179A)  <math>\leq 1.5</math> dB (20 GHz <math>&lt;</math> frequency <math>\leq</math> 87 GHz) (nom.) (MA8179A)  <math>\leq 4</math> dB (6 GHz <math>\leq</math> frequency <math>\leq</math> 20 GHz) (nom.) (MA8179B)  <math>\leq 2.5</math> dB (20 GHz <math>&lt;</math> frequency <math>\leq</math> 87 GHz) (nom.) (MA8179B)</p> <p>Amplitude ripple  MA8172A-021: <math>\leq 1.5</math> dB (23.4 GHz <math>\leq</math> frequency <math>\leq</math> 42 GHz) (nom.)  MA8172A-022/-023: <math>\leq 1.5</math> dB (22.65 GHz <math>\leq</math> frequency <math>\leq</math> 45.1 GHz) (nom.)  MA8172A-033: <math>\leq 1.5</math> dB (22.65 GHz <math>\leq</math> frequency <math>\leq</math> 49.8 GHz) (nom.)  MA8172A-003/-005: <math>\leq 3</math> dB (6 GHz <math>\leq</math> frequency <math>\leq</math> 20 GHz) (nom.)  <math>\leq 1.5</math> dB (20 GHz <math>&lt;</math> frequency <math>\leq</math> 87 GHz) (nom.)</p> <p>Total phase deviation: excluding rotation of the phase distribution  MA8172A-021: <math>\leq 22.5</math> deg. (23.4 GHz <math>\leq</math> frequency <math>\leq</math> 42 GHz) (nom.)  MA8172A-022/-023: <math>\leq 22.5</math> deg. (22.65 GHz <math>\leq</math> frequency <math>\leq</math> 45.1 GHz) (nom.)</p>
Antenna	<p>Test Antenna MA8172A-021  Frequency: 23.4 GHz to 42 GHz  Connector: K-type (m)  Impedance: 50<math>\Omega</math> (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p> <p>Test Antenna MA8172A-022/-023  Frequency: 22.65 GHz to 45.1 GHz  Connector: V-type (m)  Impedance: 50<math>\Omega</math> (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p> <p>Second Antenna MA8172A-033  Frequency: 22.65 GHz to 49.8 GHz  Connector: V-type (m)  Impedance: 50<math>\Omega</math> (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p> <p>Spurious Measurement Kit 6 GHz-87 GHz MA8172A-003/-005</p> <p>Feed Antenna (6 – 20 GHz)  Frequency: 6 GHz to 20 GHz  Connector: K-type (m)  Impedance: 50<math>\Omega</math> (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p> <p>Feed Antenna (20 – 40 GHz)  Frequency: 20 GHz to 40 GHz  Connector: K-type (m)  Impedance: 50<math>\Omega</math> (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p> <p>Feed Antenna (40 – 60 GHz)  Frequency: 40 GHz to 60 GHz  Connector: V-type (m)  Impedance: 50<math>\Omega</math> (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p> <p>Feed Antenna (60 – 87 GHz)  Frequency: 60 GHz to 87 GHz  Connector: W-type (m)  Impedance: 50<math>\Omega</math> (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p>

# Anritsu OTA Products Specifications

## CATR Anechoic Chamber MA8172A (continued)

General		<p>Exclusive interface</p> <p>Connect to MT8000A 1~6: Round multiway type connector, N (f)</p> <p>Connect to MA8178A/MA8178B (Theta, Phi): mini D-Sub 15 pin (m)</p> <p>For LTE Link Antenna: SMA (f) × 2</p> <p>General interface</p> <p>RF I/O (≤ 40 GHz): K (f) to K (f) : 2</p> <p>RF I/O (≤ 18 GHz): SMA (f) to SMA (f) : 4</p> <p>USB 3.0: Type-A (f) to Type-A (f) : 2</p> <p>Through Hole 1: φ 50 mm</p> <p>Through Hole 2: □ 18 mm (four screw stopping)</p> <p>Through Hole 3: φ 50 mm</p> <p>LAN: RJ-45 (Cat 6)</p> <p>Door: Unilateral door (left side opening)</p> <p>Aperture: 1035 (W) × 733 (H) mm</p>
Power Supply		<p>MA8172A</p> <p>Rated voltage: 100 VAC to 120 VAC/200 VAC to 240 VAC</p> <p>Rated frequency: 50 Hz to 60 Hz</p> <p>Power consumption: ≤100 VA</p> <p>≤500 VA (when implementing MA8172A-010, Z2096A)</p>
Dimensions and Mass		<p>Outer dimensions</p> <p>MA8172A: 2200 (W) × 1980 (H) × 1200 (D) mm (excluding projections)</p> <p>MA8172A-003: 350 (W) × 145 (H) × 255 (D) mm (excluding projections and cables)</p> <p>MA8172A-005: 350 (W) × 145 (H) × 255 (D) mm (excluding projections and cables)</p> <p>MA8172A-010: 736 (W) × 790 (H) × 736 (D) mm (excluding projections and cables)</p> <p>MA8172A-021: 90 (W) × 60 (H) × 175 (D) mm (excluding projections and cables)</p> <p>MA8172A-022: 50 (W) × 50 (H) × 150 (D) mm (excluding projections and cables)</p> <p>MA8172A-023: 50 (W) × 50 (H) × 150 (D) mm (excluding projections and cables)</p> <p>MA8172B-033: 50 (W) × 65 (H) × 150 (D) mm (excluding projections and cables)</p> <p>Mass</p> <p>MA8172A: ≤700 kg (including all options, excluding rack)</p> <p>MA8172A-003: ≤10 kg</p> <p>MA8172A-005: ≤10 kg</p> <p>MA8172A-010: ≤15 kg</p> <p>MA8172A-021: ≤1 kg</p> <p>MA8172A-022: ≤1 kg</p> <p>MA8172A-023: ≤1 kg</p> <p>MA8172A-033: ≤1 kg</p>
Environmental Conditions		<p>Operating temperature range: +5°C to +35°C (MA8172A, MA8172A-003/-005/-021/-022/-023/-033, without condensation)</p> <p>+5°C to +30°C (MA8172A-010, without condensation)</p> <p>Operating humidity range: ≤85% (MA8172A-003/-005, without condensation)</p> <p>≤75% (MA8172A-010, without condensation)</p> <p>Storage temperature: -20°C to +60°C (MA8172A, MA8172A-003/-005/-010/-021/-022/-023/-033, without condensation)</p> <p>Temperature range inside MA8172A-010 insulation box: -10°C to +55°C</p>
CE	EMC	2014/30/EU, EN61326-1, EN61000-3-2
	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018
UKCA	EMC	S.I. 2016 No.1091, EN 61326-1, EN61000-3-2
	LVD	S.I. 2016 No.1101, EN 61010-1
	RoHS	S.I. 2012 No.3032, EN IEC 63000: 2018







## CATR Anechoic Chamber 2 MA8172B

### CATR Anechoic Chamber 2 MA8172B

#### Spurious Measurement Kit 6 GHz-87 GHz MA8172B-003/005

#### Temperature Testing Option MA8172B-010

#### Test Antenna MA8172B-022/023

#### Second Antenna MA8172B-033

Electrical Characteristics	<p>Shielding characteristics: without cable connection via USB connector or Through Hole  <math>\geq 60</math> dB (<math>1 \text{ GHz} \leq \text{frequency} \leq 6 \text{ GHz}</math>)  <math>\geq 60</math> dB (<math>600 \text{ MHz} \leq \text{frequency} &lt; 1 \text{ GHz}</math>, <math>6 \text{ GHz} &lt; \text{frequency} \leq 87 \text{ GHz}</math>) (nom.)</p> <p>Quiet Zone  MA8179A: Specifies the flatness of the electric field amplitude and phase within a cylindrical area (QZ: quiet zone) with a diameter of 330 mm and a depth of 330 mm.  MA8179B: Specifies the flatness of the electric field amplitude and phase within a cylindrical area (QZ: quiet zone) with a diameter of 400 mm and a depth of 400 mm.</p> <p>Amplitude taper  MA8172B-022/-023: <math>\leq 1.5</math> dB (<math>22.65 \text{ GHz} \leq \text{frequency} \leq 32.125 \text{ GHz}</math>) (nom.) (MA8179A)  <math>\leq 1.7</math> dB (<math>32.125 \text{ GHz} &lt; \text{frequency} \leq 45.1 \text{ GHz}</math>) (nom.) (MA8179A)  <math>\leq 2.2</math> dB (<math>22.65 \text{ GHz} \leq \text{frequency} \leq 32.125 \text{ GHz}</math>) (nom.) (MA8179B)  <math>\leq 2.4</math> dB (<math>32.125 \text{ GHz} &lt; \text{frequency} \leq 45.1 \text{ GHz}</math>) (nom.) (MA8179B)  MA8172B-033: <math>\leq 1.5</math> dB (<math>22.65 \text{ GHz} \leq \text{frequency} \leq 32.125 \text{ GHz}</math>) (nom.) (MA8179A)  <math>\leq 1.7</math> dB (<math>32.125 \text{ GHz} &lt; \text{frequency} \leq 49.8 \text{ GHz}</math>) (nom.) (MA8179A)  <math>\leq 2.2</math> dB (<math>22.65 \text{ GHz} \leq \text{frequency} \leq 32.125 \text{ GHz}</math>) (nom.) (MA8179B)  <math>\leq 2.4</math> dB (<math>32.125 \text{ GHz} &lt; \text{frequency} \leq 49.8 \text{ GHz}</math>) (nom.) (MA8179B)  MA8172-003/-005: <math>\leq 3</math> dB (<math>6 \text{ GHz} \leq \text{frequency} \leq 20 \text{ GHz}</math>) (nom.) (MA8179A)  <math>\leq 1.5</math> dB (<math>20 \text{ GHz} &lt; \text{frequency} \leq 87 \text{ GHz}</math>) (nom.) (MA8179A)  <math>\leq 4</math> dB (<math>6 \text{ GHz} \leq \text{frequency} \leq 20 \text{ GHz}</math>) (nom.) (MA8179B)  <math>\leq 2.5</math> dB (<math>20 \text{ GHz} &lt; \text{frequency} \leq 87 \text{ GHz}</math>) (nom.) (MA8179B)</p> <p>Amplitude ripple  MA8172B-022/-023: <math>\leq 1.5</math> dB (<math>22.65 \text{ GHz} \leq \text{frequency} \leq 45.1 \text{ GHz}</math>) (nom.)  MA8172B-033: <math>\leq 1.5</math> dB (<math>22.65 \text{ GHz} \leq \text{frequency} \leq 49.8 \text{ GHz}</math>) (nom.)  MA8172B-003/-005: <math>\leq 3</math> dB (<math>6 \text{ GHz} \leq \text{frequency} \leq 20 \text{ GHz}</math>) (nom.)  <math>\leq 1.5</math> dB (<math>20 \text{ GHz} &lt; \text{frequency} \leq 87 \text{ GHz}</math>) (nom.)</p> <p>Total phase deviation: excluding rotation of the phase distribution  MA8172B-022/-023: <math>\leq 22.5</math> deg. (<math>22.65 \text{ GHz} \leq \text{frequency} \leq 45.1 \text{ GHz}</math>) (nom.)</p>
Antenna	<p>Test Antenna MA8172B-022/-023  Frequency: 22.65 GHz to 45.1 GHz  Connector: V-type (m)  Impedance: 50Ω (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p> <p>Second Antenna MA8172B-033  Frequency: 22.65 GHz to 49.8 GHz  Connector: V-type (m)  Impedance: 50Ω (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p> <p>Spurious Measurement Kit 6 GHz-87 GHz MA8172B-003/-005  Feed Antenna (6 – 20 GHz)  Frequency: 6 GHz to 20 GHz  Connector: K-type (m)  Impedance: 50Ω (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p> <p>Feed Antenna (20 – 40 GHz)  Frequency: 20 GHz to 40 GHz  Connector: K-type (m)  Impedance: 50Ω (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p> <p>Feed Antenna (40 – 60 GHz)  Frequency: 40 GHz to 60 GHz  Connector: V-type (m)  Impedance: 50Ω (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p> <p>Feed Antenna (60 – 87 GHz)  Frequency: 60 GHz to 87 GHz  Connector: W-type (m)  Impedance: 50Ω (nom.)  Polarization: Both (Vertical, Horizontal) (nom.)</p>

# Anritsu OTA Products Specifications

## CATR Anechoic Chamber 2 MA8172B (continued)

General		<p>Exclusive interface</p> <p>RF Converter 5 – 8: Round multiway type connector, N (f)</p> <p>Positioner : Theta : mini D-Sub 15 pin (m) / Phi : mini D-Sub 15 pin (m)</p> <p>Positioner : Antenna Positioner: mini D-Sub 15 pin (m)/ Reserve : mini D-Sub 15 pin (m)</p> <p>LTE Link Antenna: SMA (f) × 2</p> <p>General interface (Connector shape of MA8172B outside – Connector shape MA8172B inside)</p> <p>RF I/O (≤ 64 GHz): V (f) - V (f) : 8</p> <p>RF I/O (≤ 40 GHz): K (f) - K (f) : 2</p> <p>RF I/O (≤ 18 GHz): SMA (f) - SMA (f) : 4</p> <p>USB 3.0: Type-A (f) - Type-A (f) : 2</p> <p>Through Hole 1: φ 50 mm</p> <p>Through Hole 2: □ 18 mm (four screw stopping)</p> <p>Through Hole 3: φ 50 mm</p> <p>LAN: RJ-45 (Cat 6)</p> <p>Door: Unilateral door (left side opening)</p> <p>Aperture: 1035 (W) × 733 (H) mm</p>
Dimensions and Mass		<p>Outer dimensions</p> <p>MA8172B: 2700 (W) × 1980 (H) × 1500 (D) mm (excluding projections)</p> <p>MA8172B-003: 350 (W) × 145 (H) × 255 (D) mm (excluding projections and cables)</p> <p>MA8172B-005: 350 (W) × 145 (H) × 255 (D) mm (excluding projections and cables)</p> <p>MA8172B-010: 736 (W) × 790 (H) × 736 (D) mm (excluding projections and cables)</p> <p>MA8172B-022: 50 (W) × 50 (H) × 150 (D) mm (excluding projections and cables)</p> <p>MA8172B-023: 50 (W) × 50 (H) × 150 (D) mm (excluding projections and cables)</p> <p>MA8172B-033: 50 (W) × 65 (H) × 150 (D) mm (excluding projections and cables)</p> <p>Mass</p> <p>MA8172B: ≤750 kg (including all options, excluding rack)</p> <p>MA8172B-003: ≤10 kg</p> <p>MA8172B-005: ≤10 kg</p> <p>MA8172B-010: ≤20 kg</p> <p>MA8172B-022: ≤1 kg</p> <p>MA8172B-023: ≤1 kg</p> <p>MA8172B-033: ≤1 kg</p>
Power Supply		<p>MA8172B</p> <p>Rated voltage: 100 VAC to 120 VAC/200 VAC to 240 VAC</p> <p>Rated frequency: 50 Hz to 60 Hz</p> <p>Power consumption: ≤100 VA</p> <p>≤500 VA (when implementing MA8172B-010, Z2096A)</p>
Environmental Conditions		<p>Operating temperature range (without condensation): +15°C to +30°C (MA8172B, MA8172B-003/-005/-010/-022/-023)</p> <p>Operating humidity range (without condensation): ≤85% (MA8172B-003/-005)</p> <p>≤75% (MA8172B-010)</p> <p>Storage temperature (without condensation): -20°C to +60°C (MA8172B, MA8172B-003/-005/-010/-022/-023)</p> <p>Temperature range inside MA8172B-010 insulation box: -10°C to +55°C</p>
CE	EMC	2014/30/EU, EN61326-1, EN61000-3-2
	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018
UKCA	EMC	S.I. 2016 No.1091, EN 61326-1, EN61000-3-2
	LVD	S.I. 2016 No.1101, EN 61010-1
	RoHS	S.I. 2012 No.3032, EN IEC 63000: 2018

## Anritsu OTA Products Specifications

### CATR Anechoic Chamber 2 MA8172B (continued)

#### Antenna Positioner MA8180A

##### DFF Antenna MA8180A-001

General	Axis of rotation: Horizontal rotation Rotation speed: 1.8 rpm (max.) Rotation angle resolution (setting resolution): 0.1 deg. (nom.) Stop precision (Reproducibility): $\pm 0.5$ deg. (nom.) (when the load 30 kg or less) Angle of rotation: 30.0 deg. to 150.0 deg. (nom.) Load capacity: 30 kg or less Noise: $\leq 70$ dB (Complied with Directive 2006/42/EC (Annex I) and amending Directive 95/16/EC)	
Power	Supplied from Position Controller MA8178B	
Antenna	Frequency: 22.65 GHz to 49.8 GHz Connector: V-type (m) Impedance: 50 $\Omega$ (nom.) Polarization: Both (Vertical, Horizontal) (nom.)	
Dimensions and Mass	MA8180A Dimensions: 1600 (W) $\times$ 950 (H) $\times$ 850 (D) mm (excluding projections and cables) Mass: $\leq 90$ kg (including all options) MA8180A-001 Dimensions: 375 (W) $\times$ 650 (H) $\times$ 270 (D) mm (excluding projections and cables) Mass: $\leq 5$ kg	
Environmental Conditions	Operating temperature range (without condensation): +15°C to +40°C Operating humidity range (without condensation): $\leq 80\%$ Storage temperature (without condensation): -20°C to +60°C Storage humidity range (without condensation): $\leq 80\%$	
CE	EMC	2014/30/EU, EN61326-1, EN61000-3-2
	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018
	Machinery	2006/42/EC, EN60204-1
UKCA	EMC	S.I. 2016 No.1091, EN 61326-1, EN61000-3-2
	LVD	S.I. 2016 No.1101, EN 61010-1
	RoHS	S.I. 2012 No.3032, EN IEC 63000: 2018

# Anritsu OTA Products Ordering Information

Please specify the model/order number, name and quantity when ordering.

The names listed in the chart below are Order Names. The actual name of the item may differ from the Order Name.

Model/Order No.	Name	Model/Order No.	Name
	<b>Shield Box</b>		
MA8161A	Shield Box	MA8172A-AK041	Sliding Door
MA8161A-001	Control Panel 1	MA8172A-AK101	Temperature Testing Accessory for MA8179B
MA8161A-002	Control Panel 2	MA8172A-AK102	Positioner Base Kit for MA8179B
MA8161A-AK010	Shield Tube	MA8178A	Position Controller
Z1999A	28 GHz Antenna Unit	MA8178B	Position Controller
Z2000A	39 GHz Antenna Unit	MA8178B-AK001	MA8178B Rack Mount Kit
K241C	Precision Power Splitter, DC to 40 GHz	MA8179A	Positioner
	<b>RF Chamber</b>	MA8179A-AK010	DUT-supporting structure
MA8171A	RF Chamber	MA8179A-AK011	DUT Holder
MA8174A	Position Controller	MA8179B	Positioner
MA8175A	Positioner	MA8179B-AK010	DUT-supporting structure
MA8175A-AK001	Cable Management Kit	MA8179B-AK011	DUT Holder
MA8181A	28 GHz Test Antenna	MA8179B-AK012	DUT Pole mount structure
Z1996A	28 GHz/39 GHz Test Antenna	MA8179B-AK020	Positioner Control Cable (1.7 m)
Z2031A	Test Antenna	MA8179B-AK021	Positioner Control Cable (3.0 m)
B0746A	Chamber Rack	MA8179B-AK030	Jig For Reference Antenna
B0747A	Converter Rack	MA8179B-AK040	Rotary Table Wave Absorber
J0322A	Coaxial Cord, 0.5M	MA8179B-AK041	Wave Absorber
J0322B	Coaxial Cord, 1.0M	MA8179B-AK042	Non-slip Sheet (12 pcs)
J0322C	Coaxial Cord, 1.5M	Z1974A	Reference Antenna
J0322D	Coaxial Cord, 2.0M	Z2032A	Reference Antenna
J1762A	Positioner Control Cable (3.0 m)	Z2065A	Shield Tube
J1775A	Coaxial Cable (KM-KM, 0.3 m)	Z2096A	Heater Controller
J1775B	Coaxial Cable (KM-KM, 1.0 m)	J1806D	VJ-KP Adaptor
J1775C	Coaxial Cable (KM-KM, 2.0 m)	J1811B	Coaxial cable (VML-VM, 2.5 m)
J1775D	Coaxial Cable (KM-KM, 3.0 m)	ML2437A	Power Meter
J1795A	Coaxial Cable (SMA (M)-SMA (M), 0.5 m)	MA2444D	High Accuracy Sensor
J1795B	Coaxial Cable (SMA (M)-SMA (M), 1.0 m)	MA2445D	High Accuracy Sensor
J1795C	Coaxial Cable (SMA (M)-SMA (M), 1.5 m)	41KC-10	Fixed Attenuator
J1795D	Coaxial Cable (SMA (M)-SMA (M), 2.0 m)	41VA-10	Fixed Attenuator
J1811A	Coaxial cable (VM-VM, 0.28 m)	34VFK50A	Precision Adapter, DC to 43.5 GHz, V (f) - K (m), 50Ω
J1811B	Coaxial cable (VML-VM 2.5 m)		<b>CATR Anechoic Chamber 2</b>
Z1983A	Tray	MA8172B	CATR Anechoic Chamber 2
Z1984A	Jig for DUT Tray	MA8172B-003	Spurious Measurement Kit 6GHz-87GHz
Z1985A	Wave Absorber	MA8172B-005	Spurious Measurement Kit 6GHz-87GHz
Z1986A	Hook and Loop Fastener	MA8172B-010	Temperature Testing Option
Z2009A	Link Antenna	MA8172B-022	Test Antenna
Z2065A	Shield Tube	MA8172B-023	Test Antenna
B0752A	Link Antenna Holder	MA8172B-033	Second Antenna
J1798A	GPIO-USB-HS+	MA8172B-AK011	Converter Install Kit
J1806A	VJ-VJ Adaptor	MA8172B-AK013	Switching Hub
J1806B	VJ-KJ Adaptor	MA8172B-AK021	Antenna Mounting Base
	<b>CATR Anechoic Chamber</b>	MA8172B-AK022	NR FR2 Link Antenna Kit
MA8172A	CATR Anechoic Chamber	MA8172B-AK023	LTE Link Antenna Kit
MA8172A-003	Spurious Measurement Kit 6 GHz-87 GHz	MA8172B-AK024	NR FR2 Link Antenna Kit
MA8172A-005	Spurious Measurement Kit 6 GHz-87 GHz	MA8172B-AK025	FR2 Link Antenna Angle Kit for MA8179B
MA8172A-010	Temperature Testing Option	MA8172B-AK031	Monitor Camera
MA8172A-021	Test Antenna	MA8172B-AK032	Additional Rack(41U)
MA8172A-022	Test Antenna	MA8172B-AK033	Interferer Accessory
MA8172A-023	Test Antenna	MA8172B-AK041	Sliding Door
MA8172A-033	Second Antenna	MA8172B-AK101	Temperature Testing Accessory for MA8179B
MA8172A-AK011	Converter Install Kit	MA8172B-AK103	Positioner Base Kit for MA8179A
MA8172A-AK012	Converter Tray	MA8172B-AK104	Additional Parts for Temperature Testing
MA8172A-AK013	Switching Hub	MA8172B-AK105	Positioner Base Kit for MA8179B
MA8172A-AK021	Antenna Mounting Base	MA8172B-UG301	MA8172A to MA8172B Upgrade
MA8172A-AK022	NR FR2 Link Antenna Kit	MA8172B-UG303	Spurious Measurement Kit Upgrade 3
MA8172A-AK023	LTE Link Antenna Kit	MA8180A	Antenna Positioner
MA8172A-AK024	NR FR2 Link Antenna Kit	MA8180A-001	DFF Antenna
MA8172A-AK025	FR2 Link Antenna Angle Kit for MA8179B	MA8180A-AK001	Converter Install Kit
MA8172A-AK031	Monitor Camera		
MA8172A-AK032	Additional Rack (41U)		
MA8172A-AK033	Interferer Accessory		



## Anritsu OTA Products Related Products

### Radio Communication Test Station MT8000A



#### All-in-One 5G RF Measurements and Protocol Tests

- Flexible Platform using Modular Architecture
- Support both Standalone and non-Standalone modes

### New Radio RF Conformance Test System ME7873NR



#### Trust 5G conformance test system

- Early 3GPP Compliant Test Case Release
- Support Global Mobile Terminals
- The System with Stable Measurement
- Measurement Functions for Efficient R&D

### 5G NR Mobile Device Test Platform ME7834NR



#### All-in-One 5G NR Support for Protocol Conformance Tests and Carrier Acceptance Test

- Supports 3GPP defined bands from Sub-6GHz to mm-Wave
- Support 5G New Radio (NR) Technology in both Standalone and Non-Standalone mode
- Support LTE, LTE-Advanced (LTE-A), LTE-A Pro, and W-CDMA
- Upgrade your current ME7834 system for 5G

## • United States

### **Anritsu Americas Sales Company**

450 Century Parkway, Suite 190, Allen, TX 75013 U.S.A.  
Phone: +1-800-Anritsu (1-800-267-4878)

## • Canada

### **Anritsu Electronics Ltd.**

700 Silver Seven Road, Suite 120, Kanata,  
Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

## • Brazil

### **Anritsu Eletronica Ltda.**

Praça Amadeu Amaral, 27 - 1 Andar  
Blvd Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada  
Mexico, Ciudad de Mexico, 11520, MEXICO  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

## • Mexico

### **Anritsu Company, S.A. de C.V.**

Blvd Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada  
Mexico, Ciudad de Mexico, 11520, MEXICO  
Phone: +52-55-4169-7104

## • United Kingdom

### **Anritsu EMEA Ltd.**

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

## • France

### **Anritsu S.A.**

12 avenue du Québec, Immeuble Goyave,  
91140 VILLEBON SUR YVETTE, France  
Phone: +33-1-60-92-15-50

## • Germany

### **Anritsu GmbH**

Nemetschek Haus, Konrad-Zuse-Platz 1,  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

## • Italy

### **Anritsu S.r.l.**

Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy  
Phone: +39-6-509-9711

## • Sweden

### **Anritsu AB**

Kistagången 20 B, 2 tr, 164 40 Kista, Sweden  
Phone: +46-8-534-707-00

## • Finland

### **Anritsu AB**

Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5),  
FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100

## • Denmark

### **Anritsu A/S**

c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,  
2300 Copenhagen S, Denmark  
Phone: +45-7211-2200

## • Russia

### **Anritsu EMEA Ltd.**

#### **Representation Office in Russia**

Tverskaya str. 16/2, bld. 1, 7th floor., Moscow, 125009, Russia  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

## • Spain

### **Anritsu EMEA Ltd.**

#### **Representation Office in Spain**

Paseo de la Castellana, 141. Planta 5, Edificio Cuzco IV  
28046, Madrid, Spain  
Phone: +34-91-572-6761

## • Austria

### **Anritsu EMEA GmbH**

Am Belvedere 10, A-1100 Vienna, Austria  
Phone: +43-(0)1-717-28-710

## • United Arab Emirates

### **Anritsu EMEA Ltd.**

#### **Anritsu A/S**

Office No. 164, Building 17, Dubai Internet City  
P. O. Box - 501901, Dubai, United Arab Emirates  
Phone: +971-4-3758479

## • India

### **Anritsu India Private Limited**

6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,  
Doddanekundi, Outer Ring Road, Bengaluru - 560048, India  
Phone: +91-80-6728-1300  
Fax: +91-80-6728-1301

## • Singapore

### **Anritsu Pte. Ltd.**

11 Chang Charn Road, #04-01, Shriro House, Singapore 159640  
Phone: +65-6282-2400  
Fax: +65-6282-2533

## • Vietnam

### **Anritsu Company Limited**

16th Floor, Peakview Tower, 36 Hoang Cau Street, O Cho Dua Ward,  
Dong Da District, Hanoi, Vietnam  
Phone: +84-24-3201-2730

## • P.R. China (Shanghai)

### **Anritsu (China) Co., Ltd.**

Room 2701-2705, Tower A, New Caohejing International  
Business Center No. 391 Gui Ping Road Shanghai, 200233, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

## • P.R. China (Hong Kong)

### **Anritsu Company Ltd.**

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

## • Japan

### **Anritsu Corporation**

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan  
Phone: +81-46-296-6509  
Fax: +81-46-225-8352

## • Korea

### **Anritsu Corporation, Ltd.**

5FL, 235 Pangyojeok-ro, Bundang-gu, Seongnam-si,  
Gyeonggi-do, 13494 Korea  
Phone: +82-31-696-7750  
Fax: +82-31-696-7751

## • Australia

### **Anritsu Pty. Ltd.**

Unit 20, 21-35 Ricketts Road, Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

## • Taiwan

### **Anritsu Company Inc.**

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817