

## HOT ION VACUUM GAUGES


SPECIFICATIONS		BPG400	BPG402	BCG450
Sensor technology		Bayard-Alpert + Pirani	Bayard-Alpert (dual filament) + Pirani	Bayard-Alpert + Pirani + CDG + ATM sensor
Measurement range		5 x 10 <sup>-10</sup> ... 1000 mbar 3.8 x 10 <sup>-10</sup> ... 750 Torr		5 x 10 <sup>-10</sup> ... 1500 mbar 3.75 x 10 <sup>-10</sup> ... 1125 Torr
Accuracy (N <sub>2</sub> ) <sup>1</sup>	10 <sup>-8</sup> ... 10 <sup>-2</sup> mbar	±15 % of reading		-
	10 <sup>-8</sup> ... 50 mbar	-		±15% of reading
	50 ... 950 mbar 950 ... 1050 mbar	-		±5% of reading ±2.5% of reading
Repeatability (N <sub>2</sub> ) <sup>1</sup>	10 <sup>-8</sup> ... 10 <sup>-2</sup> mbar	5% of reading		
Degas	p < 7.2 x 10 <sup>-6</sup> mbar	Electron bombardment (max. 3 min)		
Electrical connection (analog / RS232)		D-sub, 15-pin, male		
Supply voltage		+20 ... +28V / 0.8 A (dc) <sup>2</sup>		
Output signal analog		0 ... 10 V (dc)		10.13 V (dc)
Voltage vs. pressure		log-linear, 0.75 V/decade		
Materials exposed to vacuum		Yt <sub>2</sub> O <sub>3</sub> , Ir, Pt, Mo, Cu, W, NiFe, NiCr, stainless steel, glass		Yt <sub>2</sub> O <sub>3</sub> , Ir, Mo, Cu, W, NiFe, NiCr, Al <sub>2</sub> O <sub>3</sub> , SnAg stainless steel, glass
Temperature	Operating	0 ... +50°C		
	Bakeout	at flange with flange extension electronics removed		80°C 150°C <sup>3</sup> 150°C
	Storage	-20 ... +70°C		
Degree of protection		IP30		
Onboard sensor calibration data		-	yes	yes
Setpoints		Two with digital interfaces <sup>2</sup>	One for analog version Two with digital interfaces <sup>2</sup>	Two along with digital interfaces <sup>2</sup>
Display (optional)		yes (only analog / RS232 versions)		
Interfaces	digital interface 1	RS232 (integrated in D-sub15 connector)		
	digital interface 2	Profibus DP, DeviceNet	Profibus DP, DeviceNet, EtherCAT, ProfiNET	

<sup>1</sup> Typically  
<sup>2</sup> 2W protected against power reversal and transient over-voltages  
<sup>3</sup> horizontally mounted



## DIMENSIONS

### BPG40x / BCG450

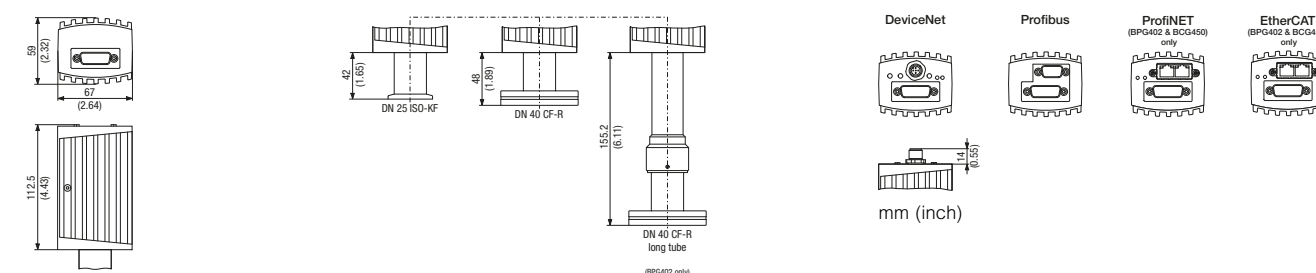


[www.inficon.com](http://www.inficon.com) [reachus@inficon.com](mailto:reachus@inficon.com)

Due to our continuing program of product improvements, specifications are subject to change without notice.  
 itb11e1-a ©2020 INFICON

## The Hot Ion Family

### MEASUREMENT RANGE

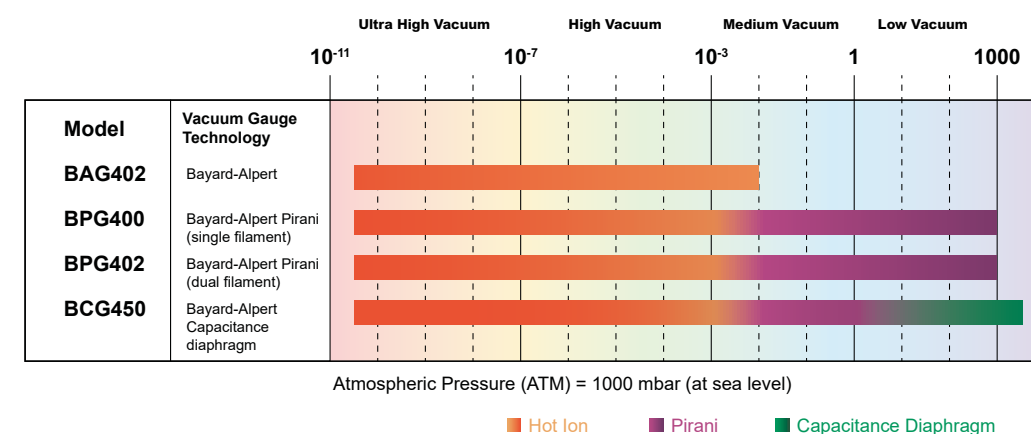

## Hot Ion Vacuum Gauges

From atmosphere to ultrahigh vacuum with one gauge





# From atmosphere to ultrahigh vacuum with one gauge

The INFICON Hot Ion Family of vacuum gauges combines the advantages of up to three different technologies in a single compact economic package to measure process and base pressure from  $5 \times 10^{-10}$  to 1500 mbar ( $3.75 \times 10^{-10}$  to 1125 Torr). Combining technologies reduces the complexity of installation, setup, and integration, thus reducing cost and valuable tool space.



## TYPICAL APPLICATIONS

- Pressure measurement for semiconductor process, transfer, and load lock chambers
- General vacuum measurement and control in the low to ultrahigh vacuum range
- Physical vapor deposition (PVD) in industrial coating

## ADVANTAGES AT A GLANCE


- Up to 13 decades in one gauge
- Save costs and tool space
- Install and forget
- Long lifetime
- Easy to exchange sensing element

For applications that require stand alone hot ion gauge technology, INFICON offers the single technology Bayard Alpert Hot Ion Gauge BAG402-S.


The supported single or dual filament options offer superior accuracy and longevity. A broad range of interface options enable simple system integration.




## CDG WORKING PRINCIPLE

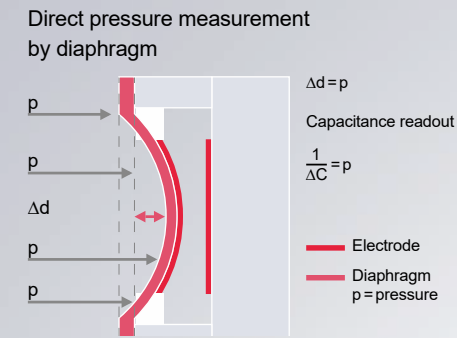


## REPLACEMENT SENSOR WITH ON-BOARD CALIBRATION DATA CHIP (BAG402, BPG402, BCG450)

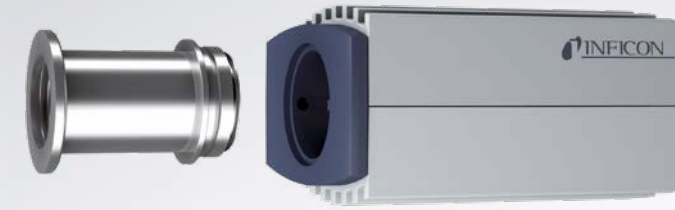

## DIFFERENTIAL PRESSURE MEASUREMENT

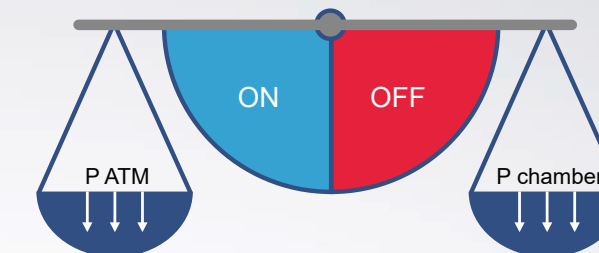


## BAYARD-ALPERT SENSOR SYSTEM

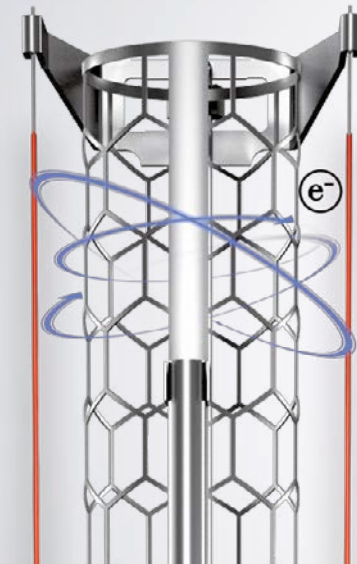


Long lifetime yttrium oxide coated iridium filaments

## PIRANI PRINCIPLE

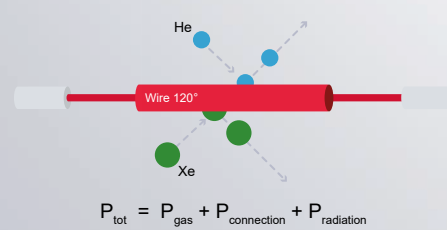


The temperature will be conducted through the gas molecules. The temperature loss of the hot filament is a function of the pressure.

## STABILITY AND ACCURACY

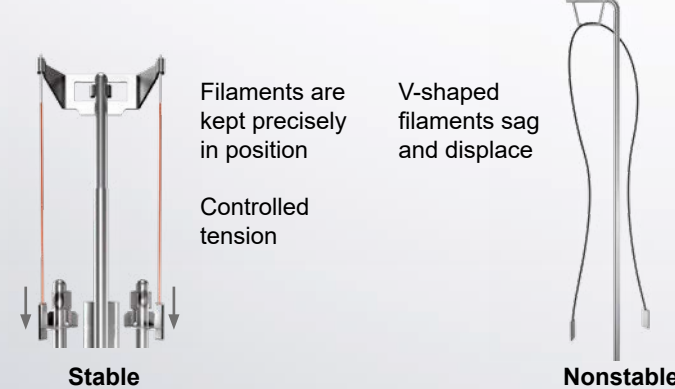

## GAS TYPE INDEPENDENCE (BCG450)

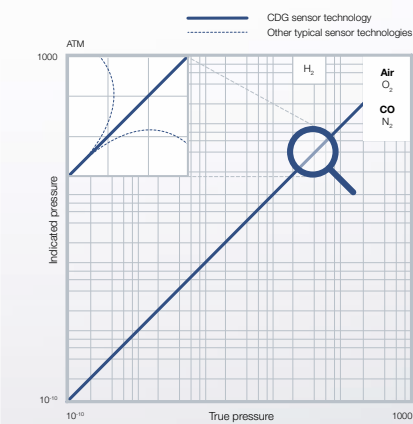

## INTERFACES



## FEATURES

- Standard Logarithmic analog output signal
- Display
- Setpoints
- Status LED
- Single-, Dual, Triple Gauge Sensor
- ATM SWITCH function

## ENHANCED LIFETIME THROUGH INTELLIGENT FILAMENT ON/OFF CONTROL

