



**Pressure &**

**Solutions Vacuum Measurement**

WWW.MKSINST.COM

## PBMS2B

### TWO-CHANNEL PORTABLE BARATRON® MEASUREMENT SYSTEM

Designed with the cleanroom in mind, the PBMS2B is a portable two-channel pressure standard that is designed for in situ applications. Equally at home on the bench as on the production floor, the unit may be used for any pressure measurement application in the range of  $10^{-5}$  to 1000 Torr.

The system includes one or two Type 627B Baratron capacitance manometers, a Type PDR2000 display and an uninterruptable power supply all housed in a rugged wheeled caddy with an extendible handle for easy towing. The caddy also includes an integral tilt stand which, when extended, places the unit at an angle of 15 degrees from the vertical, thereby improving visibility of the display when the unit is on the floor.


#### Features & Benefits

- Provides for in situ verification of process gauge accuracy and tool-to-tool consistency
  - Reduces downtime caused by removing the process gauge for calibration
  - Eliminates the unnecessary replacement of properly functioning instruments
  - Provides a diagnostic tool for troubleshooting
- Select from 8 ranges: 0.02 to 1000 Torr full scale
- Temperature controlled Type 627B Baratron® Capacitance Manometer provides stable measurements at 0.12% to 0.25% of Reading accuracy
- Inconel® and stainless steel wetted surfaces permit use with many corrosive gases
- Second channel may be used for another standard manometer or may be used to monitor the device under test
- Components are packaged in a convenient wheeled caddy which is readily moved about the production facility
- No warm up delays: an uninterruptable power supply maintains power to the manometer for 1 hour during transit
- The transducer is traceable to NIST which assists in compliance with government and industry regulations such as ISO9000




## Typical Application

The illustration to the right (Figure 1) shows a typical set up for process set point verification. The PBMS2B's Type 627 reference standard is removed from its storage drawer and placed in close proximity to the process tool's manometer port. This connection is facilitated by using a combination isolation valve such as the IDA™ valve. With the transfer standard connected to the IDA valve's access port via a short length of bellows tubing, the transfer standard can be used to verify the accuracy of the process gauge and check system set point pressures.

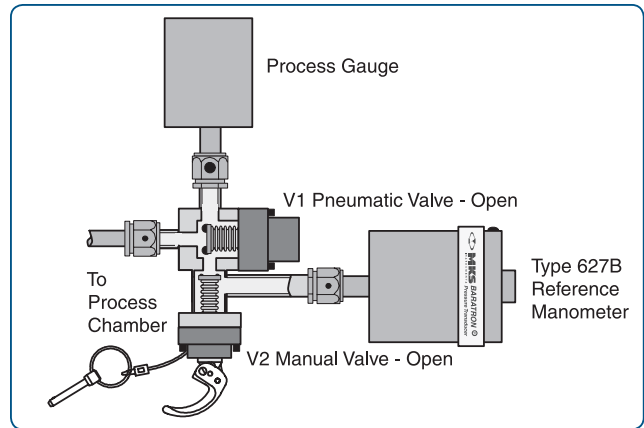

**Figure 1 —**  
Typical set up for process set point verification

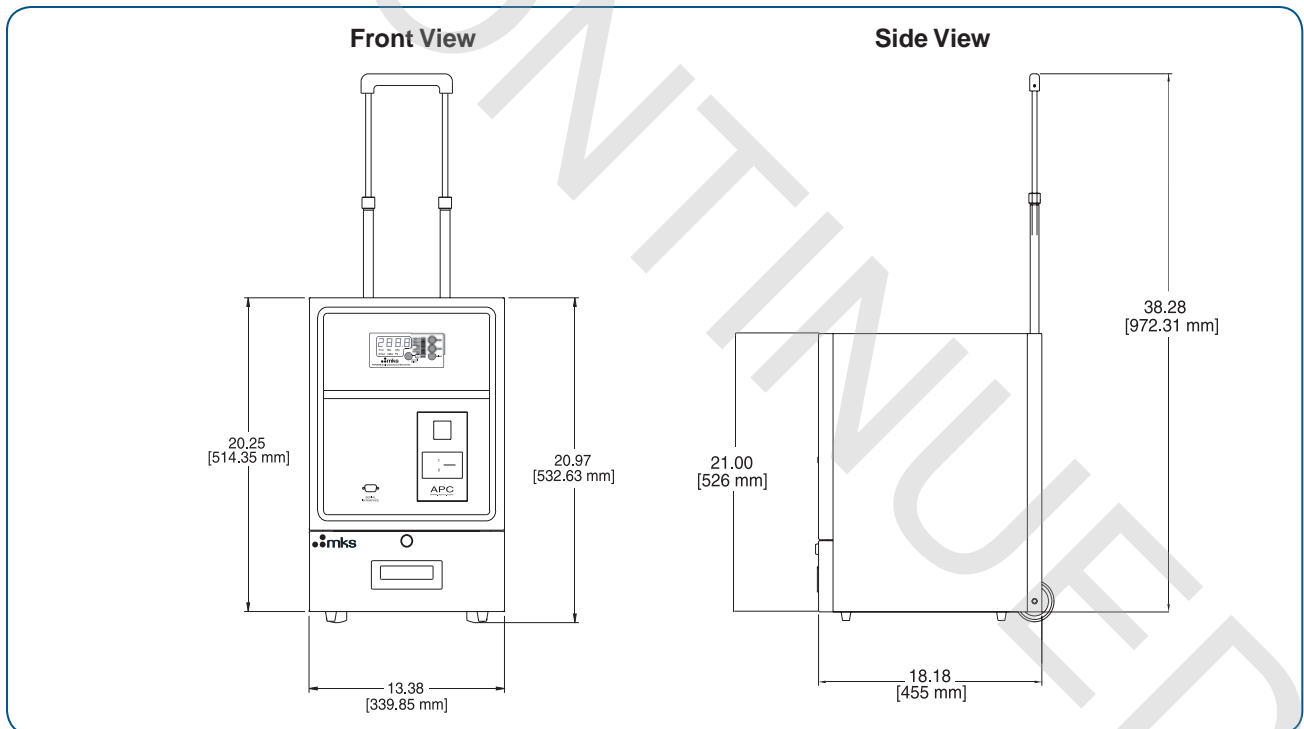

## Dimensional Drawing —

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).



## Specifications

<b>Reference Manometer</b>	MKS Type 627B Absolute Sensor (NIST traceable), see 600 Series Selection Guide for other specifications
<b>Baratron® Transducer Accuracy</b> (non-linearity, hysteresis, and non-repeatability)	Standard: $\pm 0.12\%$ of Reading (all ranges except 0.15% for 0.05 and 0.1 Torr, $\pm 0.25\%$ for 0.02 Torr)
<b>Resolution</b> (of F.S.)	$1 \times 10^{-4}$
<b>Fittings</b>	$\frac{1}{2}$ " tubulation, NW16KF or 8 VCR®, female
<b>Operating Temperature Range</b>	15° to 40°C
<b>Readout Electronics</b>	MKS Type PDR2000, 4½-digit LCD
<b>Power Required</b>	110 VAC, 60Hz; 220 VAC, 50Hz; 100 VAC, 50/60 Hz; 3A
<b>Warm-up Time/Start Time</b>	4 hours. However, use of the internal 280 VA UPS will keep the Transfer Standard warmed up and ready for immediate use for at least 60 minutes.
<b>Configuration</b>	Removable Transfer Standard (10 ft./3m cable)
<b>Enclosure</b>	Metal wheeled caddy with extendible handle and tilt stand
<b>Weight</b>	75 lb. (34 Kg)



## Ordering Information

Ordering Code Example: PBMS2B0101AU2

Type PBMS2B	Code	Configuration
PBMS2B Portable Baratron Measurement System	PBMS2B	PBMS2B
<b>Range, Manometer 1</b>		
0.02 mmHg	U2	01
0.05	U5	
0.1	.1	
1	01	
10	11	
100	12	
1000	13	
<b>Range, Manometer 2</b>		
0.02 mmHg	U2	01
0.05	U5	
0.1	.1	
1	01	
10	11	
100	12	
1000	13	
None	00	
<b>Fittings</b>		
½" Diameter tubulation	A	A
8 VCR female	B	
NW16KF	D	
<b>Input Power</b>		
Standard USA & Canada input power 110 VAC, 60 Hz	U	U
220 VAC, 50 Hz	F	
100 VAC, 50/60 Hz	J	
<b>Interface</b>		
RS-232 (standard)	2	2



### MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201  
Andover, MA 01810  
Tel: 978.645.5500  
Tel: 800.227.8766 (in U.S.A.)  
Web: www.mksinst.com

### MKS Instruments, Inc. Pressure & Vacuum Measurement Solutions

Six Shattuck Road  
Andover, MA 01810  
Tel: 978.975.2350

PBMS2B - 7/17  
© 2003 MKS Instruments, Inc.  
All rights reserved.

Some Baratron® capacitance manometer products may not be exported to many end user countries without both US and local government export licenses under ECCN 2B230. MKS products provided subject to the US and other country export regulations. Diversion or transfer contrary to U.S. or other export laws is prohibited.

Specifications are subject to change without notice. mksinst™ and IDA™ are trademarks of MKS Instruments, Inc., Andover, MA. Baratron® is a registered trademark of MKS Instruments, Inc., Andover, MA. VCR® is a registered trademark of Swagelok® Marketing Co., Solon, OH.