

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 931307



N-Channel JFETs

2N4117A PN4117A SST4117
 2N4118A PN4118A SST4118
 2N4119A PN4119A SST4119

PRODUCT SUMMARY				
Part Number	V _{GS(off)} (V)	V _{(BR)GSS} Min (V)	g _{fs} Min (μS)	I _{DSS} Min (μA)
4117	-0.6 to -1.8	-40	70	30
4118	-1 to -3	-40	80	80
4119	-2 to -6	-40	100	200

FEATURES

- Ultra-Low Leakage: 0.2 pA
- Very Low Current/Voltage Operation
- Ultrahigh Input Impedance
- Low Noise

BENEFITS

- Insignificant Signal Loss/Error Voltage with High-Impedance Source
- Low Power Consumption (Battery)
- Maximum Signal Output, Low Noise
- High Sensitivity to Low-Level Signals




APPLICATIONS

- High-Impedance Transducer Amplifiers
- Smoke Detector Input
- Infrared Detector Amplifier
- Precision Test Equipment

DESCRIPTION

The 2N/PN/SST4117A series of n-channel JFETs provide ultra-high input impedance. These devices are specified with a 1-pA limit and typically operate at 0.2 pA. This makes them perfect choices for use as high-impedance sensitive front-end amplifiers.

The hermetically sealed TO-206AF package allows full military processing per MIL-S-19500 (see Military Information). The TO-226A (TO-92) plastic package provides a low-cost option. The TO-236 (SOT-23) package provides surface-mount capability. Both the PN and SST series are available in tape-and-reel for automated assembly (see Packaging Information).

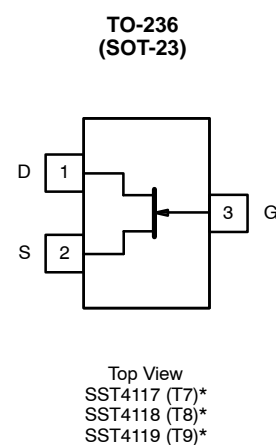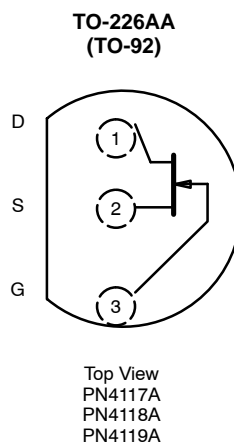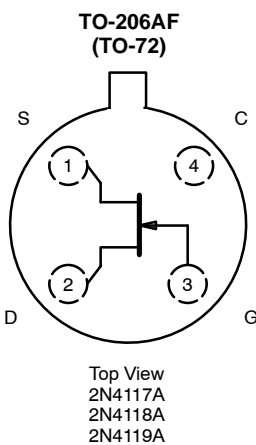

*Marking Code for TO-236

For applications information see AN105.



ABSOLUTE MAXIMUM RATINGS

Gate-Source/Gate-Drain Voltage	-40V
Forward Gate Current	50 mA
Storage Temperature :	(2N Prefix) -65 to 175°C
	(PN, SST Prefix) -55 to 150°C
Operating Junction Temperature :	(2N Prefix) -55 to 175°C
	(PN, SST Prefix) -55 to 150°C

Lead Temperature (¹ / ₁₆ " from case for 10 sec.)	300°C
Power Dissipation (case 25°C) :	(2N Prefix) ^a 300 mW
	(PN, SST Prefix) ^b 350 mW

- Notes
a. Derate 2 mW/°C above 25°C
b. Derate 2.8 mW/°C above 25°C

SPECIFICATIONS (T_A = 25°C UNLESS OTHERWISE NOTED)







Parameter	Symbol	Test Conditions	Typ ^a	Limits						Unit	
				4117		4118		4119			
				Min	Max	Min	Max	Min	Max		
Static											
Gate-Source Breakdown Voltage	V _{(BR)GSS}	I _G = -1 μA, V _{DS} = 0 V	-70	-40		-40		-40		V	
Gate-Source Cutoff Voltage	V _{GS(off)}	V _{DS} = 10 V, I _D = 1 nA		-0.6	-1.8	-1	-3	-2	-6		
Saturation Drain Current	I _{DSS}	V _{DS} = 10 V, V _{GS} = 0 V		30	90	80	240	200	600	μA	
Gate Reverse Current	I _{GSS}	V _{GS} = -20 V V _{DS} = 0 V	2N	-0.2		-1		-1		pA	
		V _{GS} = -20 V V _{DS} = 0 V T _A = 150°C		-0.4		-2.5		-2.5		nA	
		V _{GS} = -10 V V _{DS} = 0 V	PN	-0.2		-1		-1		pA	
			SST	-0.2		-10		-10		pA	
		V _{GS} = -10 V V _{DS} = 0 V T _A = 100°C	PN/SST	-0.03		-2.5		-2.5		nA	
Gate Operating Current ^b	I _G	V _{DG} = 15 V, I _D = 30 μA	-0.2							pA	
Drain Cutoff Current ^b	I _{D(off)}	V _{DS} = 10 V, V _{GS} = -8 V	0.2								
Gate-Source Forward Voltage ^b	V _{GS(F)}	I _G = 1 mA, V _{DS} = 0 V	0.7							V	
Dynamic											
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 10 V, V _{GS} = 0 V f = 1 kHz		70	210	80	250	100	330	μS	
Common-Source Output Conductance	g _{os}				3		5		10		
Common-Source Input Capacitance	C _{iss}	V _{DS} = 10 V V _{GS} = 0 V f = 1 MHz	2N/PN	1.2		3		3		3	pF
			SST	1.2							
Common-Source Reverse Transfer Capacitance	C _{rss}		2N/PN	0.3		1.5		1.5		1.5	
			SST	0.3							
Equivalent Input Noise Voltage ^b	e _n	V _{DS} = 10 V, V _{GS} = 0 V f = 1 kHz	15							nV/ √Hz	

- Notes
a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
b. This parameter not registered with JEDEC.







NT



TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

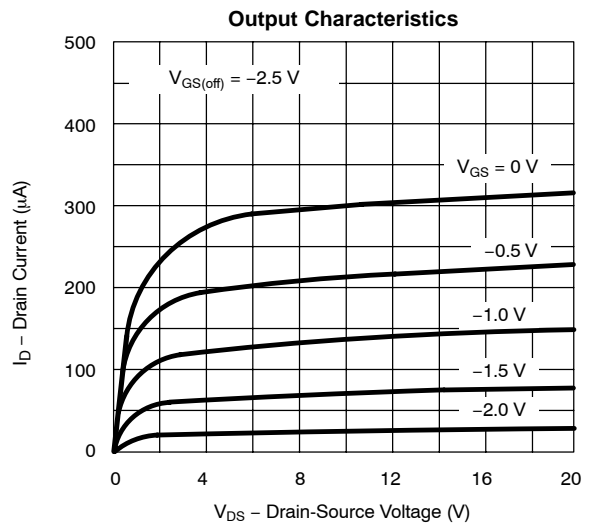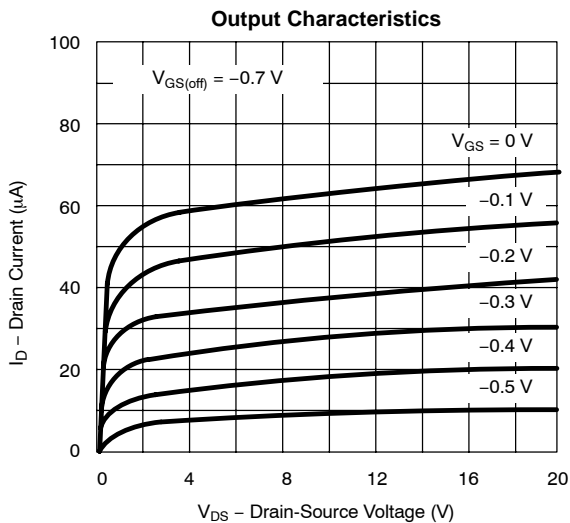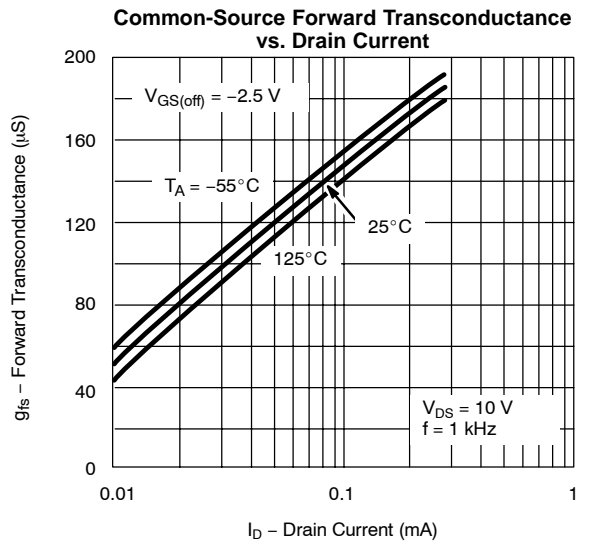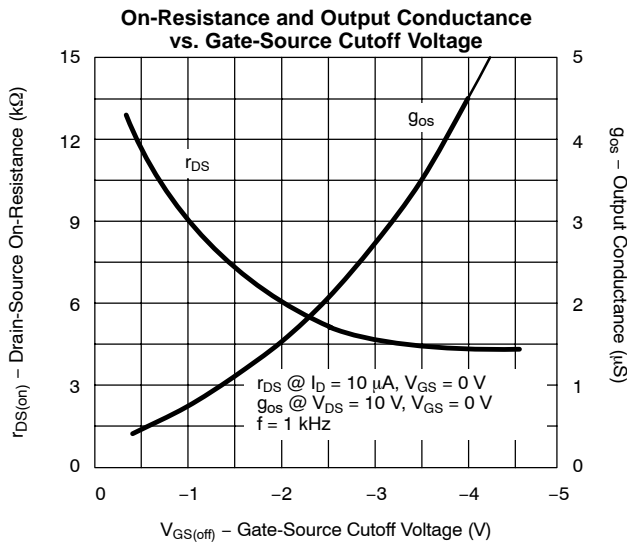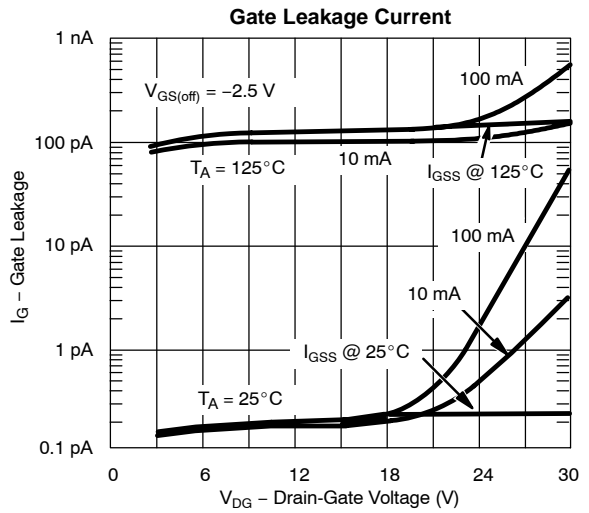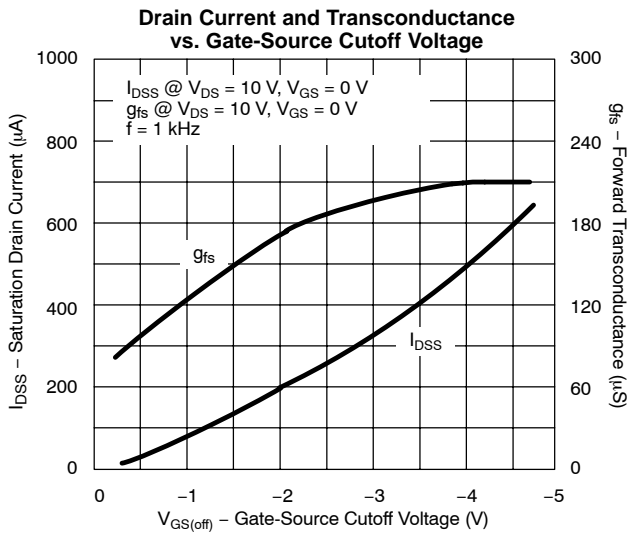


TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

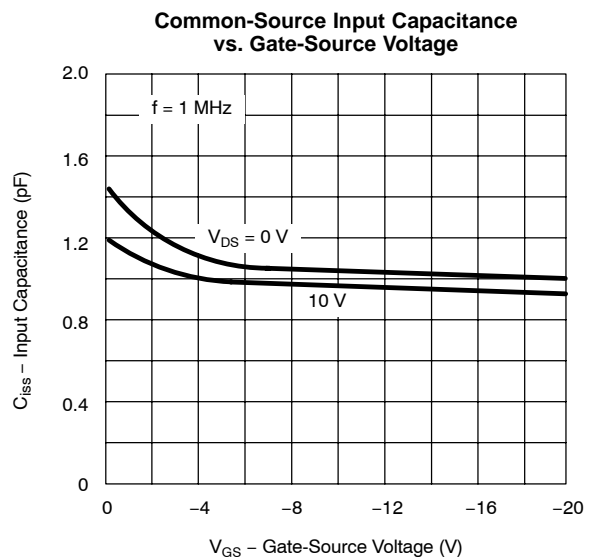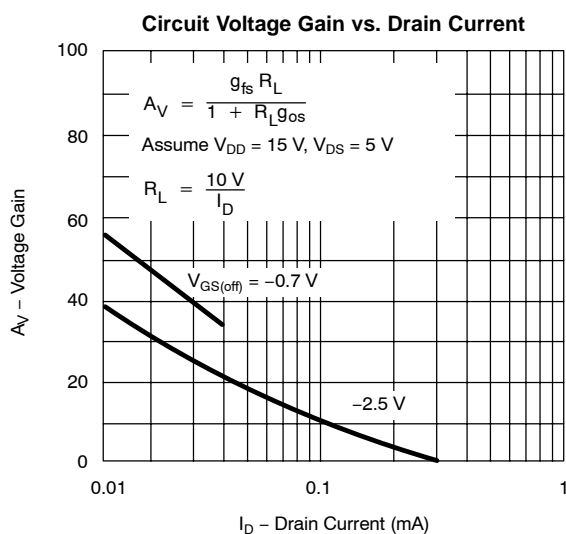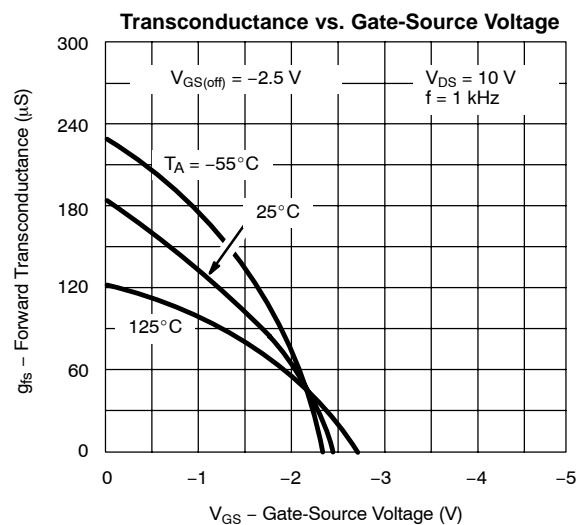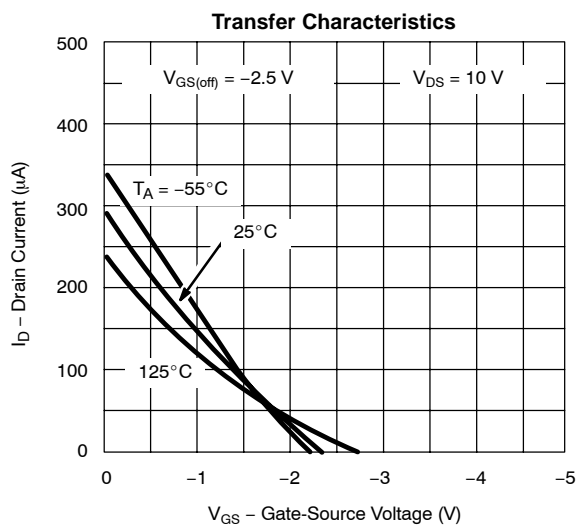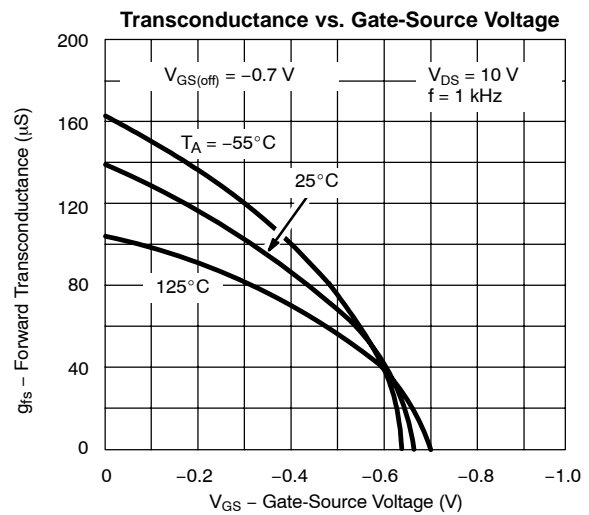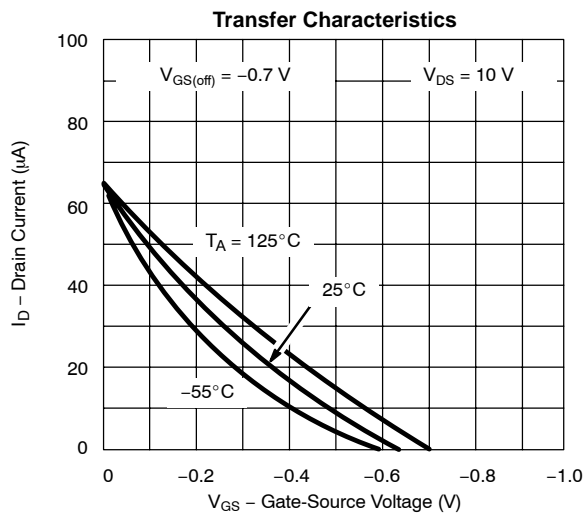




TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)


Common-Source Reverse Feedback Capacitance vs. Gate-Source Voltage

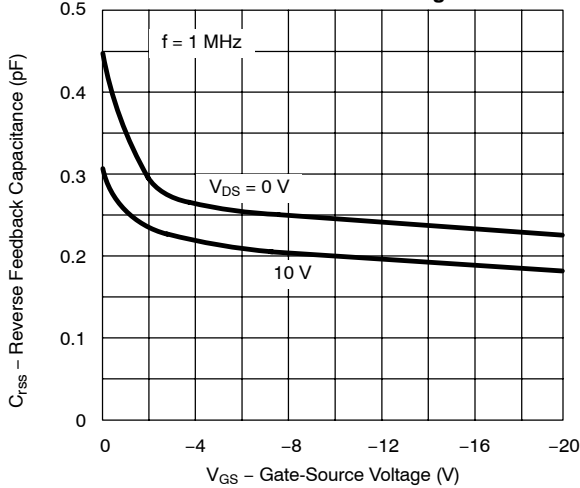


Equivalent Input Noise Voltage vs. Frequency

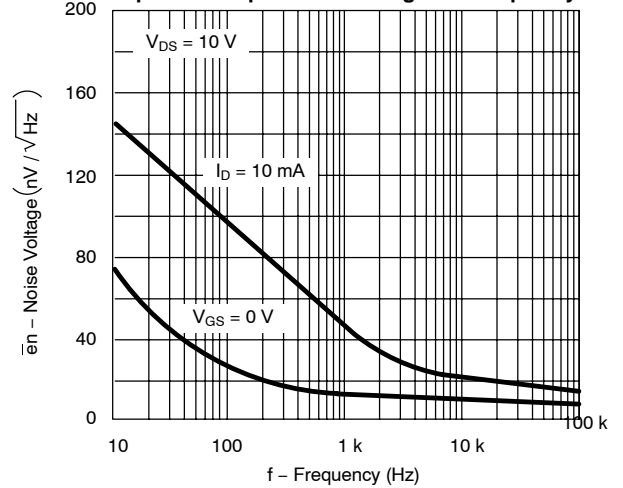

Output Conductance vs. Drain Current

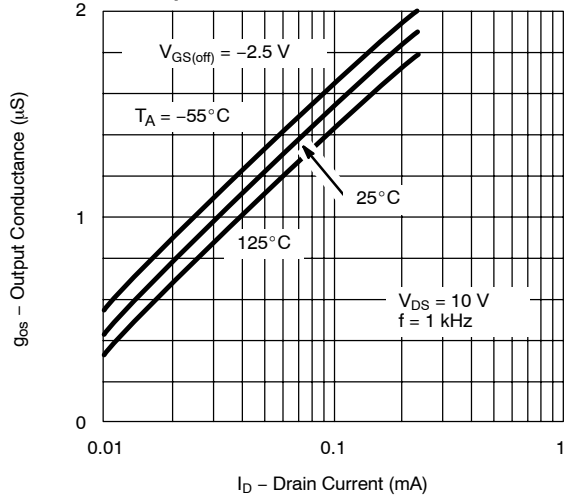

On-Resistance vs. Drain Current

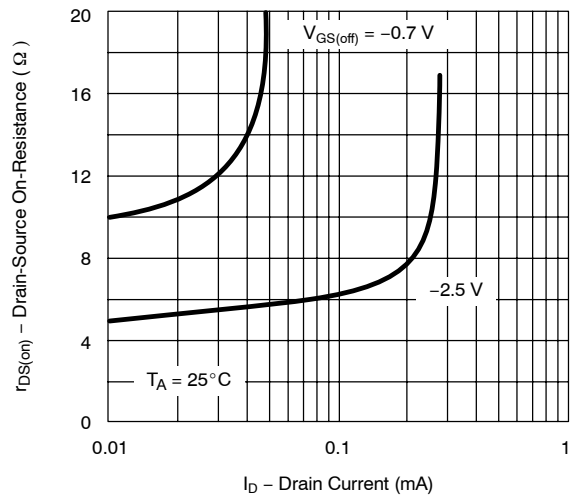



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.