



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanTG.com](mailto:sales@artisanTG.com) | [artisanTG.com](http://artisanTG.com)

**Full-service, independent repair center**  
with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**  
along with credit for buybacks and trade-ins.

**Custom engineering**  
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Hamamatsu C7300-51-12NRB* at our website: ***Click HERE***

## High Performance Digital CCD Camera C7300

250 Hz Frame Rate / 60 dB dynamic  
Random Scan Readout



The C7300 realizes 13 Hz full resolution ( $1280 \times 1024$  pixels) readout from a 20 MHz pixel clock. It has the ability to readout up to 8 different randomly selected regions of interest ( $1280 \times 16$  pixels) at 250 Hz. The C7300 is well suited for applications requiring high speed imaging or critical applications requiring high resolution under low to moderate light level conditions.

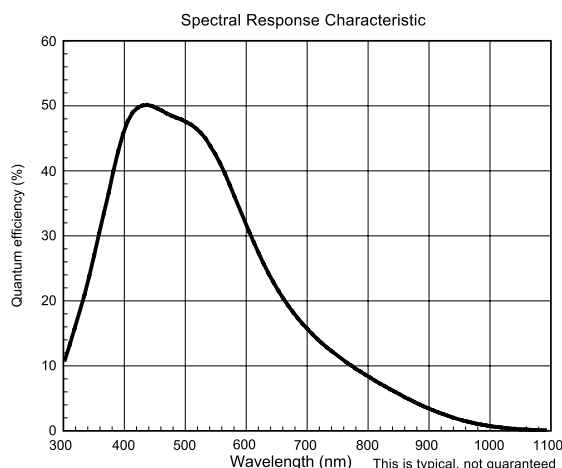

### FEATURES

- MAX 250 Hz readout ( $1280 \times 16$ )
- ROI readout function
- Random scan function
- $2 \times 2$  binning
- 1.3M pixels
- MAX 12 bit output
- UV option (down to 193 nm)
- 60 nsec ultra fast imaging
- 1/10,000 to 1 second integration
- 15 electrons readout noise

## SPECIFICATIONS

CCD	Progressive scan interline CCD
Effective pixels	1280 (H) × 1024 (V)
Pixel size	6.7 μm × 6.7 μm
Sensitive area	2/3 inch format
Spectral response characteristics	Standard : 240 nm to 1100 nm UV option : 193 nm to 1100 nm
Anti-blooming	Vertical overflow drain structure
Frame rate	13 Hz (Full pixel readout), 25 Hz (2 × 2 binning)
Read out noise	Typ. 15 electrons
Sub-array function (ROI)	Max 250 Hz (1280 × 16) 16 line steps
Selectable ROI access function	Up to 8 selectable sub-arrays (ROI)
Dynamic range*	Typ. 60 dB
A/D resolution	8 bit / 10 bit / 12 bit
Integration time	1/10,000 to 1 second
Gated exposure (option)	2 image acquisitions with 60 ns or less intervals
Lens mount	C-mount

\* Calculated from the ratio of the maximum saturation change and average readout noise.

## TYPE NUMBER

C7300-10-□□ NR □

Bit number on  
A/D converter

08: 8 bit  
10: 10bit  
12: 12bit

No suffix: Standard

U: UV chip  
P: PIV option  
D: PIV option + UV chip

## OPTION

### • Gated exposure


The C7300 can be set to acquire images with intervals as short as 60 ns at full resolution.

## FEATURE DESCRIPTIONS

### • Selectable sub-array (ROI) function


The C7300 can be set to readout sub-arrays of 1280 pixels by multiples of 16 lines by computer command.

Up to 8 sub-arrays may be selected from frame to frame at maximum frame rate.

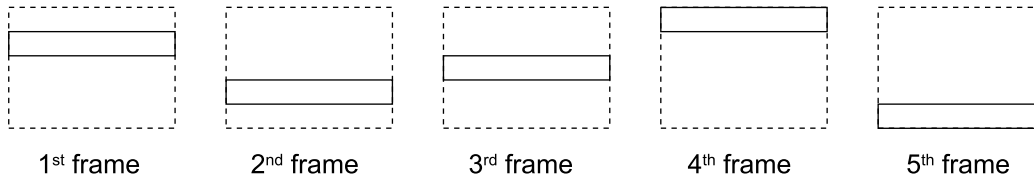


## DIMENSIONAL OUTLINES (UNIT:mm)

### • Camera head (approx. 0.7 kg)



### • Camera control (approx. 6.3 kg)



- Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.
- Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications and external appearance are subject to change without notice.

© 1999 Hamamatsu Photonics K.K.

# HAMAMATSU

Homepage Address <http://www.hamamatsu.com>

HAMAMATSU PHOTONICS K.K., Systems Division

812 Joko-cho, Hamamatsu City, 431-3196, Japan, Telephone: (81)53-431-0124, Fax: (81)53-435-1574, E-mail: [export@sys.hpj.co.jp](mailto:export@sys.hpj.co.jp)

U.S.A. and Canada: Hamamatsu Photonic Systems: 360 Foothill Road, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-1116, Fax: (1)908-231-0852, E-mail: [usa@hamamatsu.com](mailto:usa@hamamatsu.com)

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658, E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10, E-mail: [france@hamamatsu.com](mailto:france@hamamatsu.com)

United Kingdom: Hamamatsu Photonics UK Limited: Lough Point, 2 Gladbeck Way, Windmill Hill, Enfield, Middlesex EN2 7JA, United Kingdom, Telephone: (44)208-367-3560, Fax: (44)208-367-6384, E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 Solna, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01, E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E 20020 Arese (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741, E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

Cat. No. SICS1066E05  
JUL /2000 CR  
Created in Japan (PDF)

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanng.com](http://artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

