



1392 x 1040 imaging array  
4.65 x 4.65- $\mu\text{m}$  pixels

The CoolSNAP™ cf Monochrome camera from Photometrics® incorporates low-noise electronics and moderate CCD cooling to achieve good low-light sensitivity. A megapixel sensor with small, square elements ensures that each image shows extraordinary detail. This feature, along with a high-speed digitizer, shutterless operation, and an interline-transfer CCD, makes the CoolSNAP cf Monochrome camera ideal for high-resolution microscopy and inspection applications.


**Primary applications**

**Histology**

**DIC microscopy**


**Immunofluorescence**

**FISH**

**Fixed-cell GFP imaging**

**High-resolution time-lapse microscopy**

Features	Benefits
20-MHz readout	Fast image readout for high-speed focus and image capture
1392 x 1040 imaging array 4.65 x 4.65- $\mu\text{m}$ pixels	Resolves fine detail
Interline-transfer, progressive-scan CCD	Full resolution in every frame
Flexible binning and readout	Increases light sensitivity while increasing the frame rate
12-bit digitization	Quantifies bright and dim signals in the same image
Thermoelectric cooling	Increases integration times for higher sensitivity
C-mount	Easily attaches to microscopes, standard lenses, or optical equipment
Subcompact, fanless design	Low profile allows easy setup
Acquisition software	Captures, analyzes, and saves high-resolution images
PCI interface	High-bandwidth, uninterrupted data transfer with no dropped frames
PVCAM® Circular buffers Device sequencing	Supported by numerous third-party software packages Real-time focus Precise integration with shutters, filter wheels, etc.
	<i>Compatible with Windows® XP/Vista 32, Mac OS X, and Linux® (kernel versions 2.4 and 2.6.8)</i>

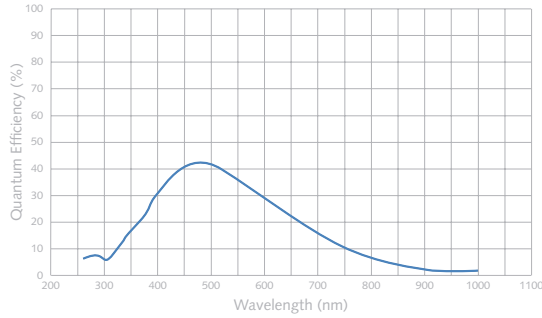

Binning	Region		
	1392 x 1040	512 x 512	256 x 256
1 x 1	11	21	38
2 x 2	21	36	56
3 x 3	28	46	71
4 x 4	36	56	83
8 x 8	56	83	125

(Frames per second)

Note: Frame rates are measured at 20 MHz with 0-second exposure times.

Specifications	
CCD image sensor	Sony® ICX205AL; interline-transfer, progressive-scan device with microlenses
CCD format	1392 x 1040 imaging array 4.65 x 4.65-µm pixels 6.5 x 4.8-mm imaging area (optically centered) 1/2" format
Grade	Sony Grade 0
Gain	3 e-/ADU
Linear full well	9700 e-
Read noise	10 e- rms @ 20 MHz
Nonlinearity	<5%
Digitizer type	12 bits @ 20 MHz
Dark current	<1 e-/p/s
Operating environment	15 to 30°C ambient
Dimensions	4.5" x 5.0" x 2.5" (1.9 lbs)
I/O	TTL output while exposing (BNC connector)

Note: Specifications are typical and subject to change.

CoolSNAP is a trademark of Photometrics. Photometrics and PVMcam are registered trademarks of Photometrics. Linux is a registered trademark of Linus Torvalds. Mac OS is a trademark of Apple Computer, Inc., registered in the U.S. and other countries. Sony is a registered trademark of Sony Corporation. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.

USA 520.889.9933  
Asia Pacific +65.6841.2094

France +33.1.60.86.03.65  
Germany +49.89.660.779.3

Japan +81.3.5639.2731  
UK +44.1628.890858

 **PHOTOMETRICS®**  
www.photometrics.com  
info@photometrics.com