

# SIGMA KOKI

## Objectives ■



 OptoSigma®

Type	Magnification	Part Number	Description	NA	WD
Visible Normal type	2x	PAL-2-B	MplanApo 2×	0.055	34
	5x	PAL-5	MplanApo 5×	0.14	41
	10x	PAL-10-A	MplanApo 10×	0.3	34
Visible Super long type	20x	PAL-20-L-A	MplanApo SL 20×	0.3	31.1
	50x	PAL-50-L-A	MplanApo SL 50×	0.42	20.7
	100x	PAL-100-L	MplanApo SL 100×	0.53	12.1
UV(266 532) Normal type Air gap	10x	PFL-10-UV-AG	Mplan UV 10×	0.2	13.5
	20x	PFL-20-UV-AG-A	Mplan UV 20×	0.36	15.07
	50x	PFL-50-UV-AG-A	Mplan UV 50×	0.42	12
	80x	PFL-80-UV-AG-LC00	Mplan UV 80×	0.55	10
UV(266 532) Glass Thickness Compensation (t0.7)Type Air gap	20x	PFL-20-UV-AG-LC07-A	LCD Mplan UV 20× (t0.7)	0.36	15.15(Air)
	50x	PFL-50-UV-AG-LC07-A	LCD Mplan UV 50× (t0.7)	0.42	11.99(Air)
	80x	PFL-80-UV-AG-LC07	LCD Mplan UV 80× (t0.7)	0.55	9.78(Air)
UV(266 532) Glass Thickness Compensation (t1.1)Type Air gap	20x	PFL-20-UV-AG-LC11-A	LCD Mplan UV 20× (t1.1)	0.36	15.2(Air)
	50x	PFL-50-UV-AG-LC11-A	LCD Mplan UV 50× (t1.1)	0.42	12.02(Air)
	80x	PFL-80-UV-AG-LC11	LCD Mplan UV 80× (t1.1)	0.55	9.65(Air)
NUV(355-532) Normal type	20x	PAL-20-NUV-A	Mplan NUV 20×	0.4	17.25
	50x	PAL-50-NUV-A	Mplan NUV 50×	0.45	15.1
	100x	PAL-100-NUV-A	Mplan NUV 100×	0.57	11.23
NUV(355-532) HR type	50x	PAL-50-NUV-HR-L	Mplan NUV HR 50×	0.65	10
	100x	PAL-100-NUV-HR	Mplan NUV HR 100×	0.7	10
NUV(355-532) Glass Thickness Compensation (t0.7)Type	20x	PAL-20-NUV-LC07-A	LCD Mplan NUV 20× ( t 0.7)	0.4	17.35(Air)
	50x	PAL-50-NUV-LC07-A	LCD Mplan NUV 50× ( t 0.7)	0.45	15.05(Air)
	100x	PAL-100-NUV-LC07-A	LCD Mplan NUV 100× ( t 0.7)	0.57	11.17(Air)
NUV(355-532) Glass Thickness Compensation (t1.1)Type	20x	PAL-20-NUV-LC11-A	LCD Mplan NUV 20× ( t 1.1)	0.4	17.4(Air)
	50x	PAL-50-NUV-LC11-A	LCD Mplan NUV 50× ( t 1.1)	0.45	15.01(Air)
	100x	PAL-100-NUV-LC11-A	LCD Mplan NUV 100× ( t 1.1)	0.57	11.13(Air)
NUV(355-532) HR Glass Thickness Compensation (t0.7)Type	50x	PAL-50-NUV-HR-L-LC07-A	LCD Mplan NUV HR 50× ( t 0.7)	0.65	9.91(Air)
NUV(355-532) HR Glass Thickness Compensation (t1.1)Type	50x	PAL-50-NUV-HR-L-LC11-A	LCD Mplan NUV HR 50× ( t 1.1)	0.65	9.89(Air)
NIR(1064-532) Normal type	10x	PAL-10-NIR	Mplan NIR 10×	0.3	31
	20x	PAL-20-NIR-LC00	Mplan NIR 20×	0.4	20.2
	50x	PAL-50-NIR-L	Mplan NIR 50×	0.45	15.1
NIR(1064-532) HR type	20x	PAL-20-NIR-HR-LC00	Mplan NIR HR 20×	0.45	20
	50x	PAL-50-NIR-HR-LC00	Mplan NIR HR 50×	0.67	10
NIR(1064-532) Glass Thickness Compensation (t0.7)Type	20x	PAL-20-NIR-LC07	LCD Mplan NIR 50× (t0.7)	0.4	19.98(Air)
	50x	PAL-50-NIR-L-LC07	LCD Mplan NIR 20× (t0.7)	0.45	15.01(Air)
NIR(1064-532) Glass Thickness Compensation (t0.7)Type	20x	PAL-20-NIR-LC11	LCD Mplan NIR 50× (t1.1)	0.4	19.85(Air)
	50x	PAL-50-NIR-L-LC11	LCD Mplan NIR 20× (t1.1)	0.45	14.97(Air)
NIR(1064-532) HR Glass Thickness Compensation (t0.7)Type	50x	PAL-50-NIR-HR-LC07	LCD Mplan NIR HR 50× (t0.7)	0.67	10.48(Air)
UV/NUV(266 355 532) Normal type Air gap	10x	PFL-10-UV/NUV-AG	Mplan UV/NUV 10	0.2	13.5
	20x	PFL-20-UV/NUV-AG-A	Mplan UV/NUV 20	0.36	15.07
	50x	PFL-50-UV/NUV-AG-A	Mplan UV/NUV 50	0.42	12
Femtosecond NIR (780) Glass Thickness Compensation (t0.7)Type	20x	PAL-20-NIR(780)-LC07	LCD MplanApo NIR(780) 20×(780)	0.45	17.2(Air)
	50x	PAL-50-NIR(780)-LC07	LCD MplanApo NIR(780) 50×(780)	0.8	3.8(Air)

# Classification of objective lenses


---

Parfocal distance / Screw size	Corresponding wavelength	Glass thickness compensation	Product Name Part Number	Main purpose of use
45mm Φ20.32×0.706	Visible	None	Bright field long working Objective Lenses <b>EPL / EPLE</b>	Visual observation
95mm Φ26×0.706	Visible	None	Bright field long working objective Lenses <b>PAL / PAL-L</b>	Visual observation
	Visible / Near ultra-violet	None/0.7mm /1.1mm	Bright field near ultra-violet objective Lenses <b>PAL-NUV</b>	Visual/Near ultra-violet observation Laser processing
	Visible / Near-infrared	None/0.7mm /1.1mm	Bright field near-infrared objective Lenses <b>PAL-NIR</b>	Visual/ Near-infrared observation Laser processing
	Visible / Ultra-violet	None/0.7mm /1.1mm	Bright field ultra-violet objective Lenses <b>PFL-UV-AG</b>	Visual/ultra-violet observation Laser processing

※ Objectives with glass thickens compensation adjustable ring is also available. Please contact us.

## Part number description


---

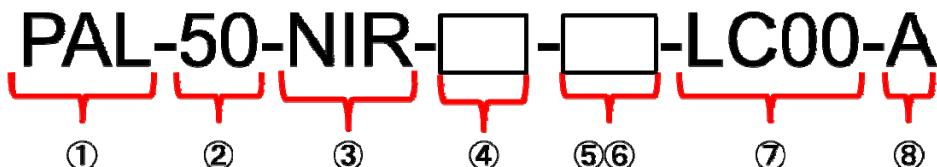

- |                |   |                   |   |
|----------------|---|-------------------|---|
| ①Lens type     | PAL: Plan apochromat<br>PFL: Plan semi-apochromat<br>(Plan Fluor)                                   | ⑤Working distance | L --> Long working distance   |
| ②Magnification | The magnification of the objective lenses   | ⑥AG               | Air gap type<br>(Only to the UV type)   |
| ③Wavelength    | None --> Visible range<br>NIR --> Near-infrared<br>NUV --> Near ultra-violet<br>UV --> Ultra-violet | ⑦Glass thickness  | LC00 --> Glass thickness is not corrected<br>LC07 --> Glass thickness is corrected to t=0.7mm<br>LC11 --> Glass thickness is corrected to t=1.1mm |
| ④Resolution    | None --> Normal resolution<br>HR --> High resolution  | ⑧Ver. Information | A~ Last updated ver.<br><br>*Blanks are omitted and left-justified<br>exp.) PAL-50-NIR-LC00   |

# Reliable integrated in-house production systems


We are operating an integrated in-house production system from planning, designing, manufacturing and to assembly. This one-stop production system contributes a lot about higher quality and shorter production time of our products as well as quality assurance and capability to deal with any technical issues.

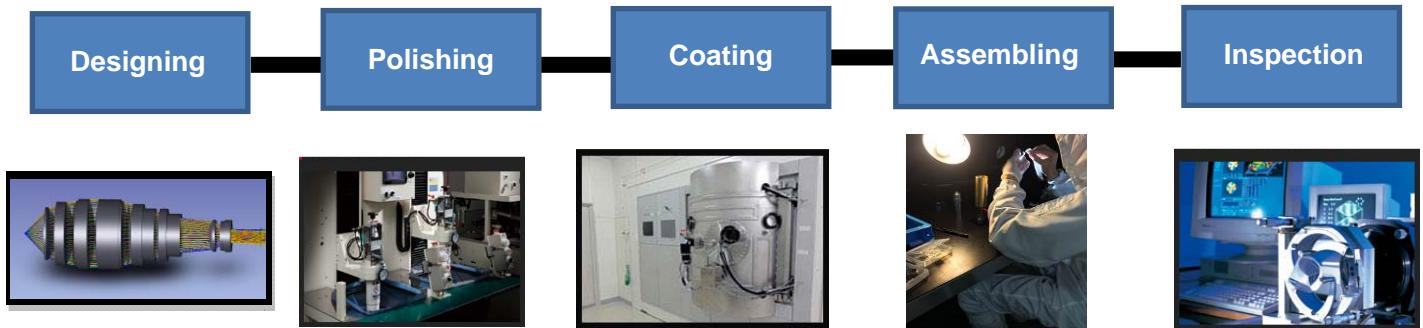

We are doing transmitted wave front inspection for all of the objectives when assembling. Totally eliminating the production error of each part and assembly errors, we are maintaining continual high quality of our products.

## Higher overall transmittance


Our objective lenses for laser processing realize high transmittance by providing our original anti-reflection coating to the processing laser wavelength band. It will be a great benefit of increasing throughput of the processing laser because of the lower absorption of the beam inside the objective lenses.

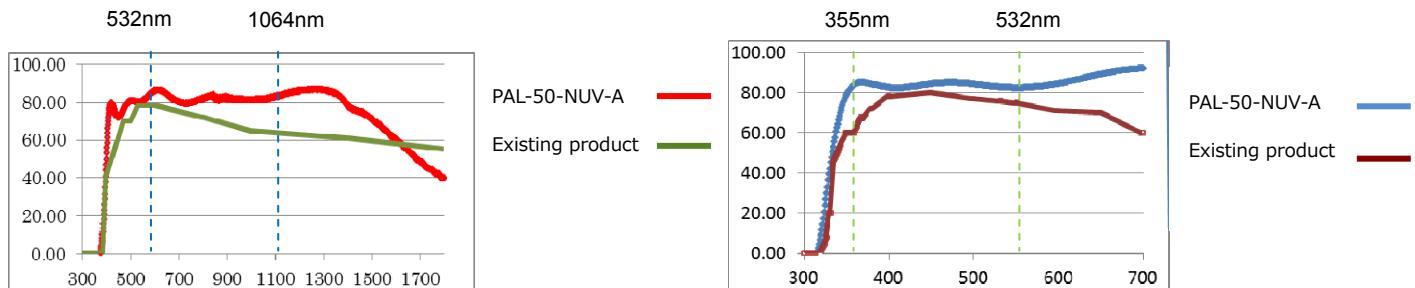


## The ideal design of minimizing aberrations between the focal point of processing laser and the focal plane of visible observation.

The visible wavelength band designed to be coincided with the focal point of the processing laser. Due to this design, it will well suit for an application that combines observation with laser processing, inspection, and measurement. It is also suited for the combination use with an autofocus system.

PAL-20-UV-AG-A

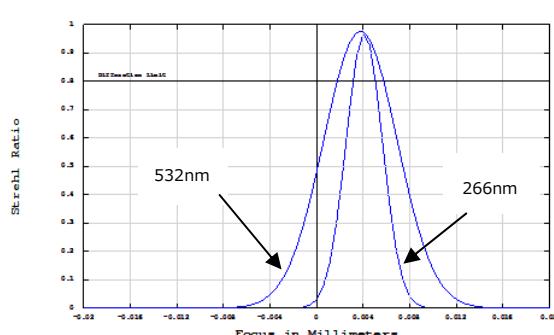


PAL-50-UV-AG-A

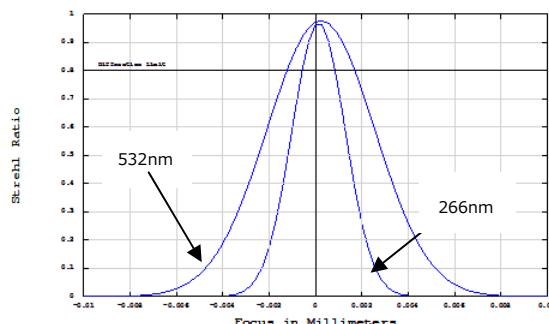

# Long Working Distance Objective Lenses (EPL / EPLE)




- Bright Field Inspection
- Infinity Corrected
- Plan APOCHROMAT
- Well work with an Auto-Focusing system due to compact and lightweight design.

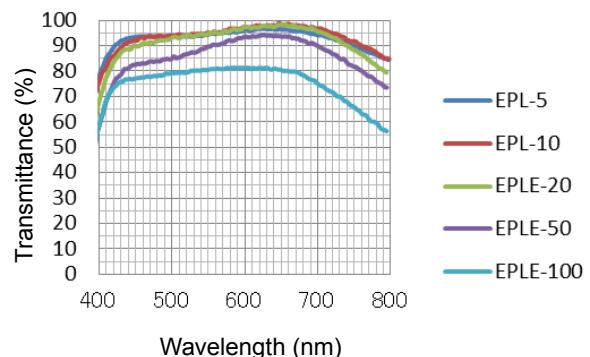


## Outline Drawing


EPL-5

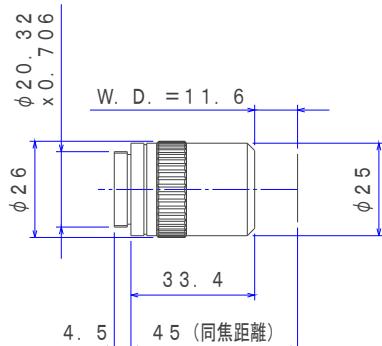


EPL-10

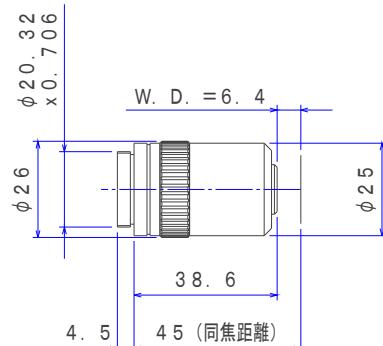


EPLE-20

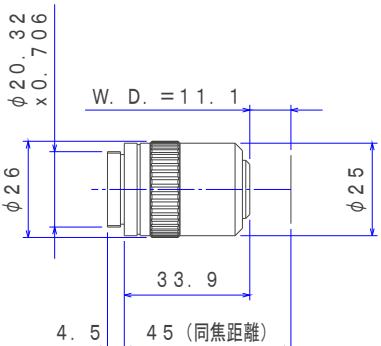

EPLE-50

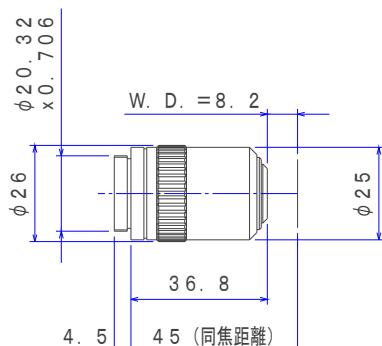

EPLE-100

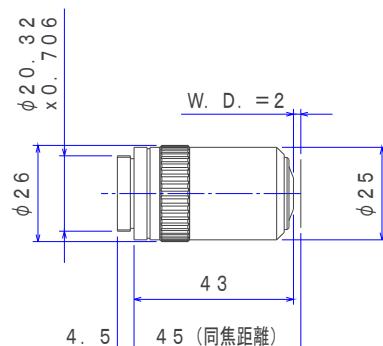


Part Number	Magnification	Focal length f [mm]	N.A.	Working distance (W.D.) [mm]	Resolution [μm]	Focal depth ±D.F [μm]	Real field of View		Weight [kg]
							(Eyepiece φ24mm) [mm]	(1/2"CCD) [mm]	
EPL-5	5×	40	0.13	11.6	2.1	16.3	φ4.8	0.96×1.28	0.085
EPL-10	10×	20	0.3	6.4	0.9	3.1	φ2.4	0.48×0.64	0.085
EPLE-20	20×	10	0.4	11.1	0.7	1.7	φ1.2	0.24×0.32	0.085
EPLE-50	50×	4	0.55	8.2	0.5	0.9	φ0.48	0.10×0.13	0.095
EPLE-100	100×	2	0.8	2	0.3	0.4	φ0.24	0.05×0.06	0.105

※ Resolution and focal depth are calculated value at wavelength of 0.55μm.

# Long Work Distance Objective Lenses (PAL)




- Bright Field Inspection
- Infinity Corrected
- Plan Apochromat

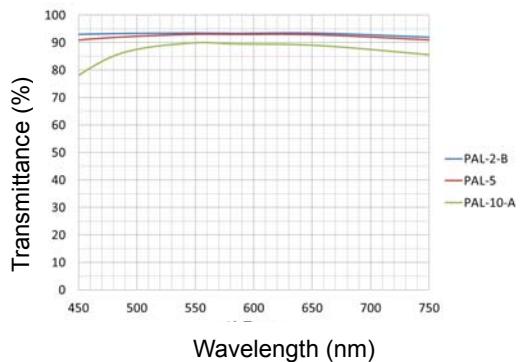


## Outline Drawing


PAL-2-B

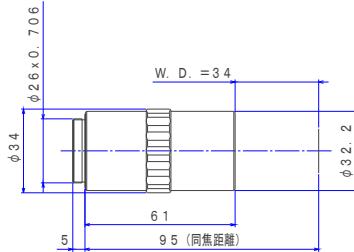

PAL-5

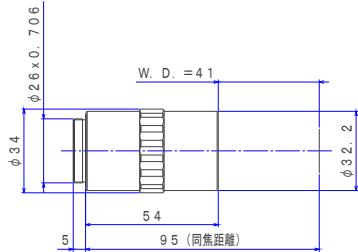

PAL-10-A

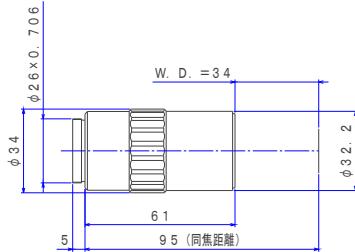


Part Number	Description	Magnification	Focal length f [mm]	N.A.	Working distance (W.D.) [mm]	Resolution [μm]	Focal depth ±D.F [μm]	Real field of View		Weight [kg]
								(Eyepiece φ24mm) [mm]	(1/2"CCD) [mm]	
PAL-2-B	MPlanApo 2x	2x	100	0.055	34	5	91	φ12	2.4×3.2	0.25
PAL-5	MPlanApo 5x	5x	40	0.14	41	2	14	φ4.8	0.96×1.28	0.24
PAL-10-A	MPlanApo 10x	10x	20	0.3	34	0.92	3.1	φ2.4	0.48×0.64	0.24

※ Resolution and focal depth are calculated value at wavelength of 0.55μm.

# Long Work Distance Objective Lenses (PAL-L)




- Bright Field Inspection
- Infinity Corrected
- Plan Apochromat

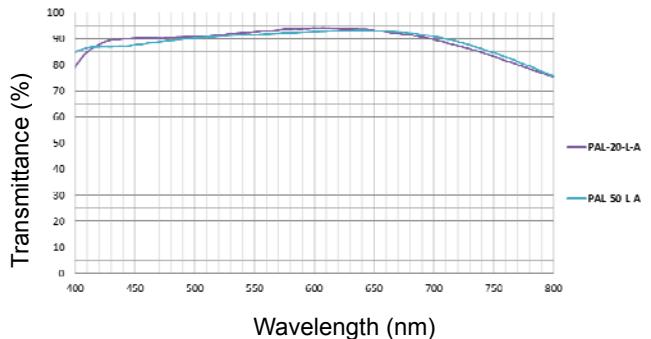


## Outline Drawing


PAL-20-L-A

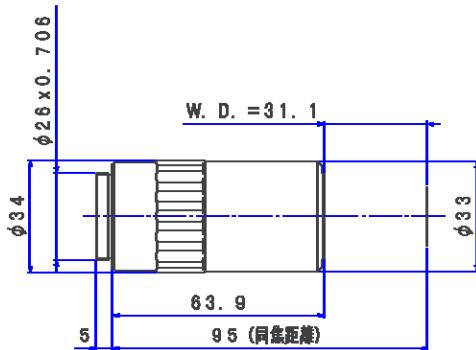

PAL-50-L-A

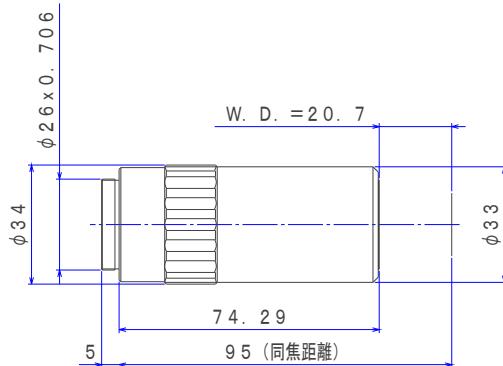

PAL-100-L

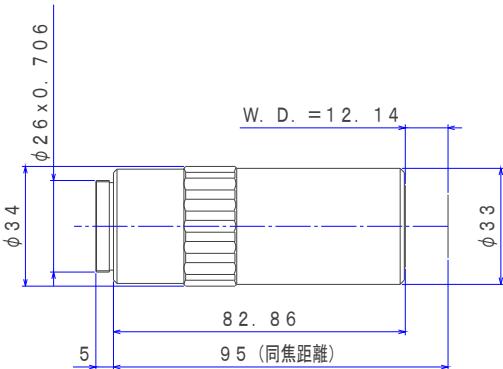

Part Number	Description	Mag nifica tion	Focal length f [mm]	N.A.	Working distance (W.D.) [mm]	Resolu tion [ $\mu\text{m}$ ]	Focal depth $\pm D.F$ [ $\mu\text{m}$ ]	Real field of View		Weight [kg]
								(Eyepiece $\phi 24\text{mm}$ ) [mm]	(1/2"CCD) [mm]	
PAL-20-L-A	MPlanApo SL20x	20x	10	0.3	31.1	0.92	3.1	$\phi 1.2$	0.24×0.32	0.28
PAL-50-L-A	MPlanApo SL 50x	50x	4	0.42	20.7	0.65	1.6	$\phi 0.48$	0.10×0.13	0.28
PAL-100-L	MPlanApo SL 100x	50x	2	0.53	12.1	0.52	0.98	$\phi 0.24$	0.05×0.06	0.34

※Resolution and focal depth are calculated value at wavelength of 0.55 $\mu\text{m}$ .


# Ultra-violet Objective Lenses (PFL-UV-AG)



- Bright Field Inspection and Laser processing
- Infinity Corrected
- 266nm and 532nm
- Higher Laser damage threshold with Air-gap design.
- Laser damage threshold (※)


0.09 J/cm<sup>2</sup> (266nm) / 0.2 J/cm<sup>2</sup> (532nm)

※Pulse width:10ns, Frequency:20Hz ,reference value

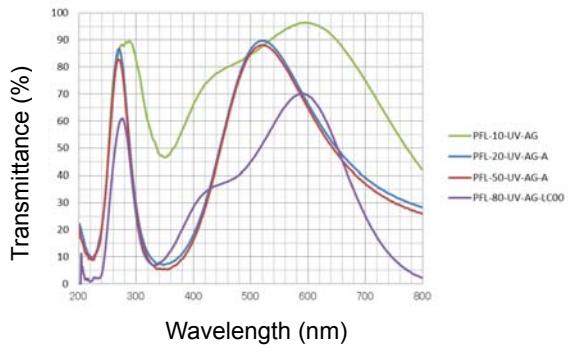


## Outline Drawing


PFL-10-UV-AG

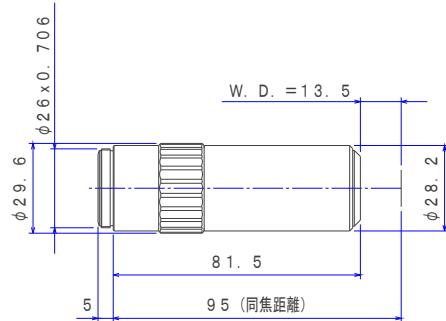


PFL-20-UV-AG-A

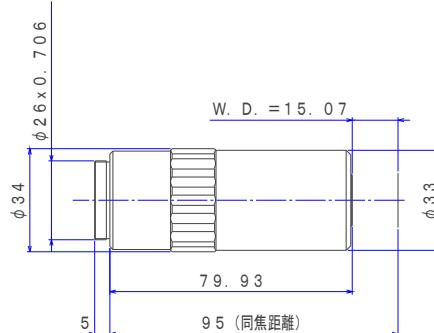

PFL-50-UV-AG-A

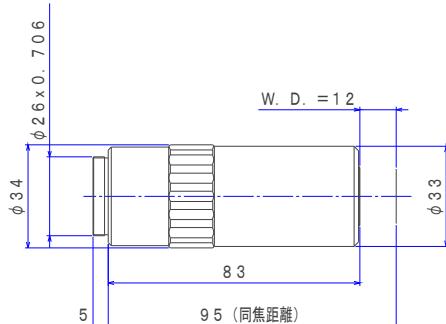

PFL-80-UV-AG-LC00

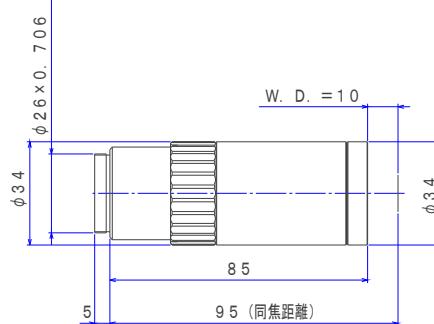

Part Number	Description	Magnification	Focal length f [mm]	N.A.	Working distance (W.D.) [mm]	Resolution [μm]	Focal depth ±D.F [μm]	Real field of View		Weight [kg]
								(Eyepiece φ24mm) [mm]	(1/2"CCD) [mm]	
PFL-10-UV-AG	MPlan UV 10x	10×	20	0.2	13.5	1.4	6.9	φ2.4	0.48×0.64	0.3
PFL-20-UV-AG-A	MPlan UV 20x	20×	10	0.36	15.07	0.76	2.1	φ1.2	0.24×0.32	0.35
PFL-50-UV-AG-A	MPlan UV 50x	50×	4	0.42	12	0.65	1.6	φ0.48	0.10×0.13	0.41
PFL-80-UV-AG-LC00	MPlan UV 80x	80×	2.5	0.55	10	0.5	0.9	φ0.3	0.06×0.08	0.35


※Resolution and focal depth are calculated value at wavelength of 0.55μm.

# Ultra-violet Objective Lenses with Cover Glass thickness compensation (PFL-UV-AG-LC)




- Bright Field Inspection and Laser processing
- Infinity Corrected
- 266nm and 532nm
- Cover glass thickness compensation ( $t=0.7\text{mm}$  and  $1.1\text{mm}$ )
- Higher Laser damage threshold with Air-gap design
- Laser damage threshold (※)  
0.09 J/cm<sup>2</sup> (266nm), 0.2 J/cm<sup>2</sup> (532nm)

※ Pulse width: 10ns, Frequency: 20Hz, reference value

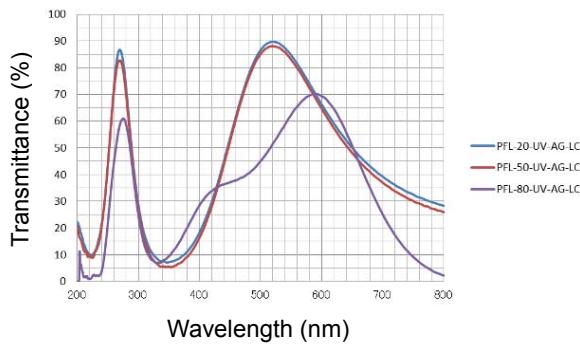

## Outline Drawing

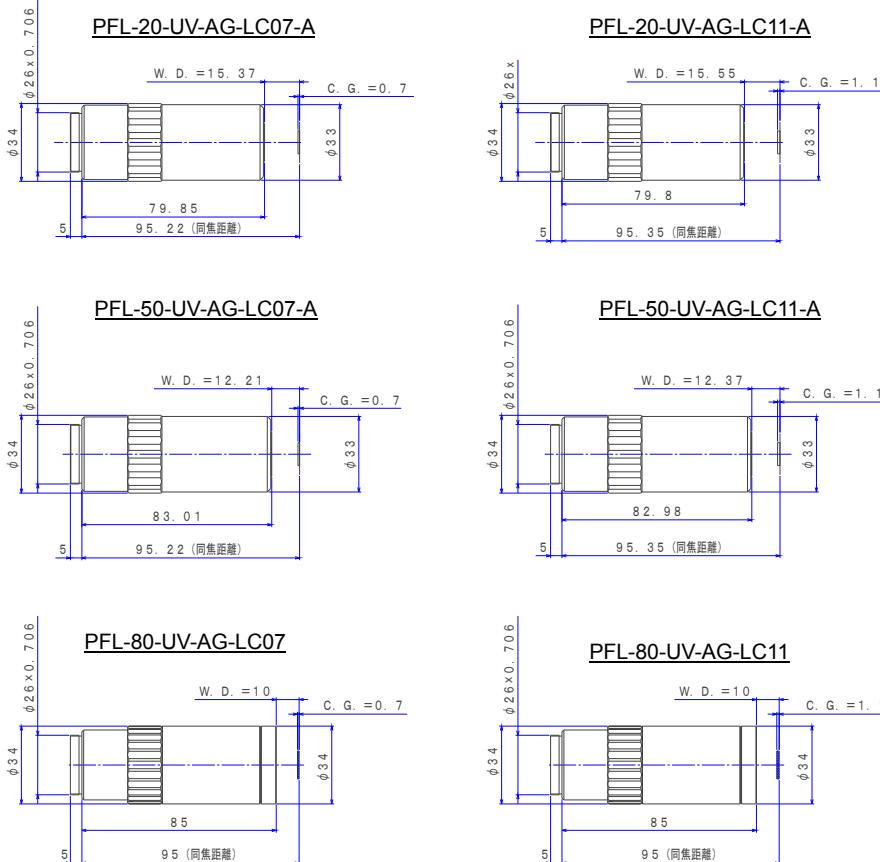

Part Number	Description	Magnification	Focal length f [mm]	N.A.	Working distance (W.D.) [mm]	Resolution [μm]	Focal depth ±D.F [μm]	Real field of View		Weight [kg]
								(Eyepiece φ24mm) [mm]	(1/2"CCD) [mm]	
PFL-20-UV-AG-LC07-A	LCD MPlan UV 20x(t <sub>0.7</sub> )	20×	10	0.36	15.15	0.76	2.1	φ1.2	0.24×0.32	0.35
PFL-20-UV-AG-LC11-A	LCD MPlan UV 20x(t <sub>1.1</sub> )	20×	10	0.36	15.2	0.76	2.1	φ1.2	0.24×0.32	0.35
PFL-50-UV-AG-LC07-A	LCD MPlan UV 50x(t <sub>0.7</sub> )	50×	4	0.42	11.99	0.65	1.6	φ0.48	0.10×0.13	0.4
PFL-50-UV-AG-LC11-A	LCD MPlan UV 50x(t <sub>1.1</sub> )	50×	4	0.42	12.02	0.65	1.6	φ0.48	0.10×0.13	0.4
PFL-80-UV-AG-LC07	LCD MPlan UV 80x(t <sub>0.7</sub> )	80×	2.5	0.55	9.78	0.5	0.9	φ0.3	0.06×0.08	0.35
PFL-80-UV-AG-LC11	LCD MPlan UV 80x(t <sub>1.1</sub> )	80×	2.5	0.55	9.65	0.5	0.9	φ0.3	0.06×0.08	0.35


※ Resolution and focal depth are calculated value at wavelength of 0.55μm.

※ Working distance: value at air

# Near Ultra-violet Objective Lenses (PAL-NUV)



- Bright Field Inspection and Laser processing
  - Infinity Corrected
  - Near UV (355nm)
  - Plan Apochromat
- Laser damage threshold (※)  
0.05 J/cm<sup>2</sup> (355nm)  
0.1 J/cm<sup>2</sup> (532nm)

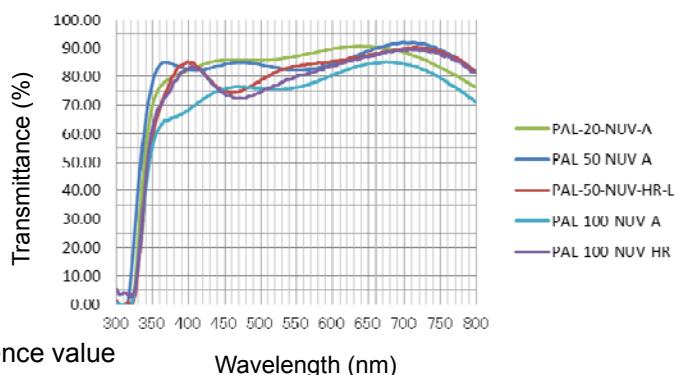


※Pulse width:10ns, Frequency:20Hz / reference value


Wavelength (nm)

## Outline Drawing


PAL-20-NUV-A

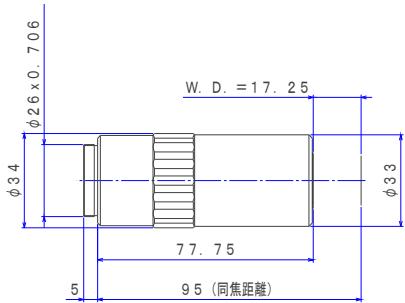


PAL-50-NUV-A

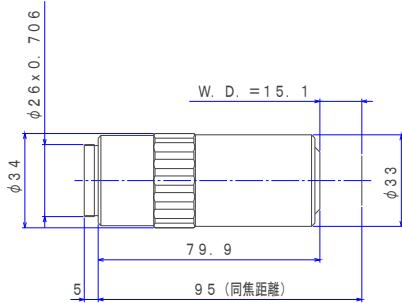


PAL-50-NUV-HR-L

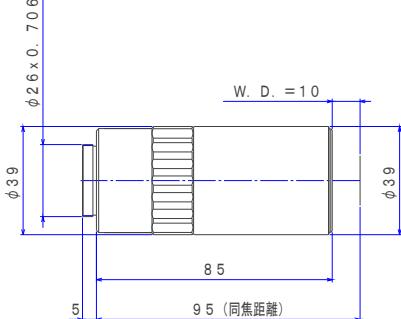

PAL-100-NUV-A

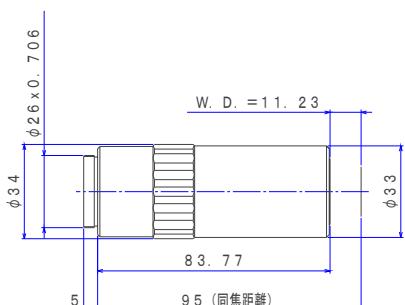

PAL-100-NUV-HR

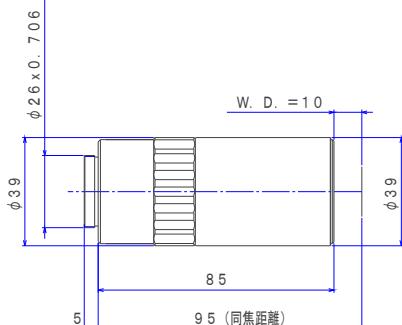

Part Number	Description	Magnification	Focal length f [mm]	N.A.	Working distance (W.D.) [mm]	Resolution [μm]	Focal depth ±D.F [μm]	Real field of View		Weight [kg]
								(Eyepiece φ24mm) [mm]	(1/2"CCD) [mm]	
PAL-20-NUV-A	MPlanApo NUV 20x	20x	10	0.4	17.25	0.69	1.7	φ1.2	0.24×0.32	0.35
PAL-50-NUV-A	MPlanApo NUV 50x	50x	4	0.45	15.1	0.61	1.4	φ0.48	0.10×0.13	0.36
PAL-50-NUV-HR-L	MPlanApo NUV HR 50x	50x	4	0.65	10	0.42	0.65	φ0.48	0.10×0.13	0.51
PAL-100-NUV-A	MPlanApo NUV 100x	100x	2	0.57	11.23	0.48	0.8	φ0.24	0.05×0.06	0.38
PAL-100-NUV-HR	MPlanApo NUV HR 100x	100x	2	0.7	10	0.39	0.6	φ0.24	0.05×0.06	0.53


※Resolution and focal depth are calculated value at wavelength of 0.55μm.

# Ultra-violet Objective Lenses with Cover Glass thickness compensation (PAL-NUV-LC)




- Bright Field Inspection and Laser processing
- Infinity Corrected
- Near UV (355nm)
- Cover glass thickness compensation ( $t=0.7\text{mm}$  and  $1.1\text{mm}$ )
- Plan Apochromat
- Laser damage threshold (※)  
 $0.05\text{ J/cm}^2$  (355nm),  $0.1\text{ J/cm}^2$  (532nm)

※Pulse width:10ns, Frequency:20Hz , reference value

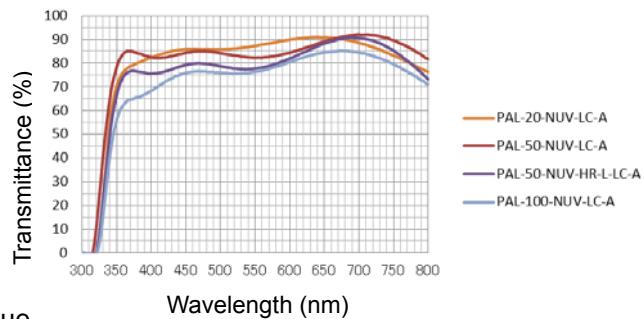

## Outline Drawing

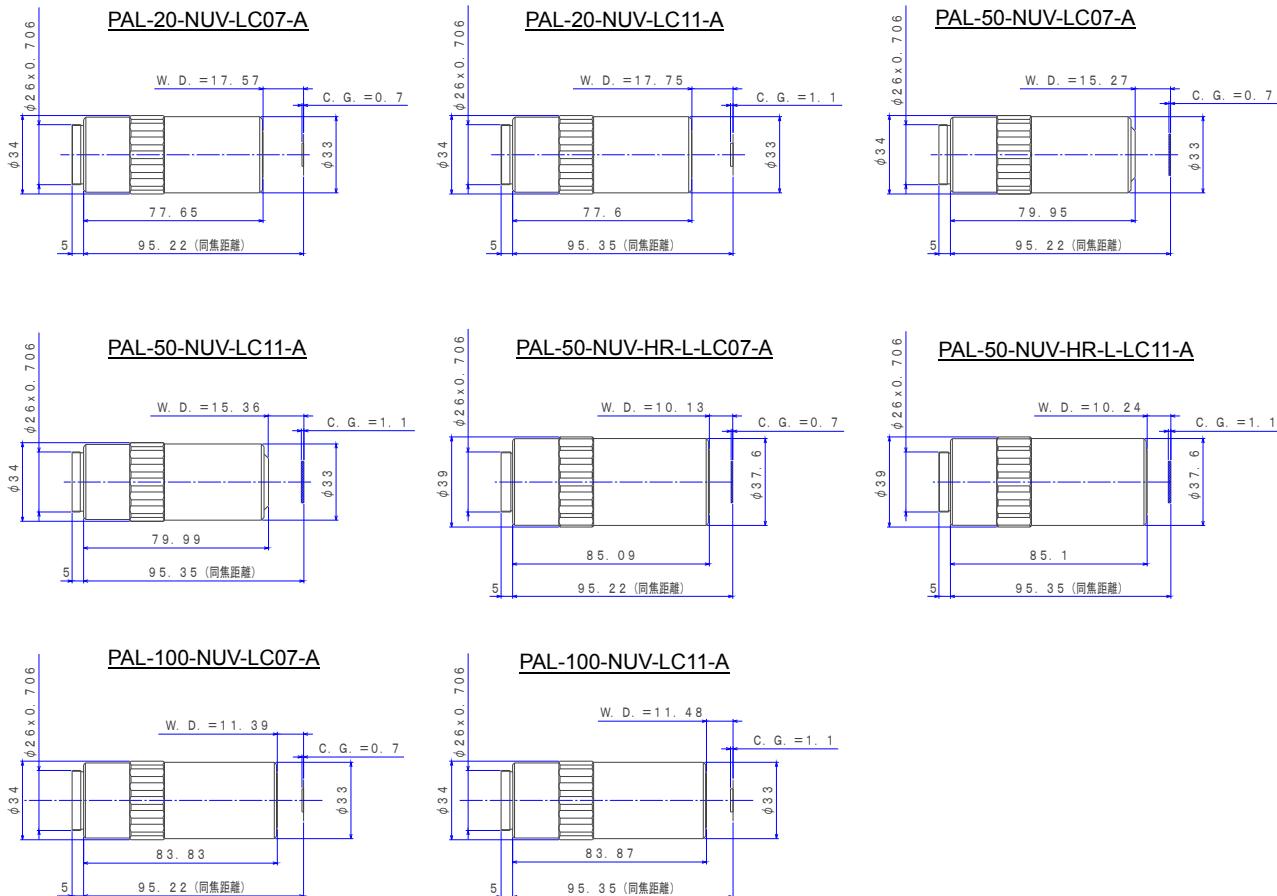

Part Number	Description	Mag nification	Focal length f [mm]	N.A.	Working distance (W.D.) [mm]	Resolu tion [ $\mu\text{m}$ ]	Focal depth $\pm D.F$ [ $\mu\text{m}$ ]	Real field of View		Weight [kg]
								(Eyepiece Ø24mm) [mm]	(1/2"CCD) [mm]	
PAL-20-NUV-LC07-A	LCD MPlanApo NUV 20x (t0.7)	20x	10	0.4	17.35	0.69	1.7	Ø1.2	0.24x0.32	0.35
PAL-20-NUV-LC11-A	LCD MPlanApo NUV 20x(t1.1)	20x	10	0.4	17.4	0.69	1.7	Ø1.2	0.24x0.32	0.35
PAL-50-NUV-LC07-A	LCD MPlanApo NUV 50x (t0.7)	50x	4	0.45	15.05	0.61	1.4	Ø0.48	0.10x0.13	0.36
PAL-50-NUV-LC11-A	LCD MPlanApo NUV 50x(t1.1)	50x	4	0.45	15.01	0.61	1.4	Ø0.48	0.10x0.13	0.36
PAL-50-NUV-HR-L-LC07-A	LCD MPlanApo NUV HR 50x(t0.7)	50x	4	0.65	9.91	0.42	0.7	Ø0.48	0.10x0.13	0.51
PAL-50-NUV-HR-L-LC11-A	LCD MPlanApo NUV HR 50x(t1.1)	50x	4	0.65	9.89	0.42	0.7	Ø0.48	0.10x0.13	0.51
PAL-100-NUV-LC07-A	LCD MPlanApo NUV 100x (t0.7)	100X	2	0.57	11.17	0.48	0.8	Ø0.24	0.05x0.06	0.39
PAL-100-NUV-LC11-A	LCD MPlanApo NUV 100x(t1.1)	100X	2	0.57	11.13	0.48	0.8	Ø0.24	0.05x0.06	0.39


※Resolution and focal depth are calculated value at wavelength of  $0.55\mu\text{m}$ . ※Working distance: value at air

# Near Infrared Objective Lenses (PAL-NIR)




- Bright Field Inspection and Laser processing
- Infinity Corrected
- 1064nm
- Plan Apochromat
- Laser damage threshold (※)  
0.1 J/cm<sup>2</sup> (532nm)  
0.2 J/cm<sup>2</sup> (1064nm)

※Pulse width:10ns, Frequency:20Hz , reference value

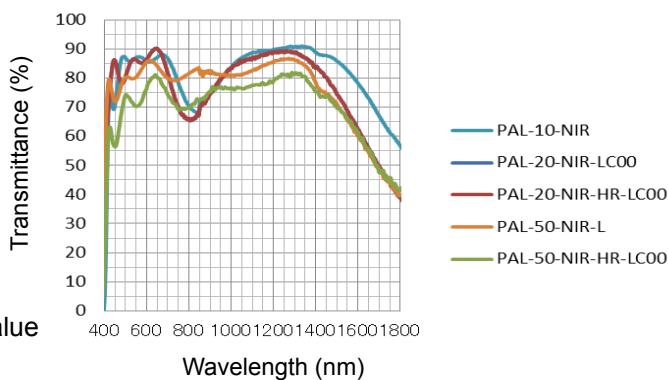


## Outline Drawing


PAL-10-NIR

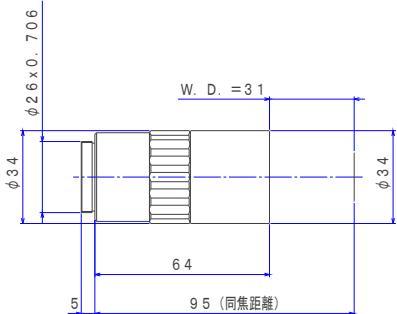


PAL-20-NIR-LC00

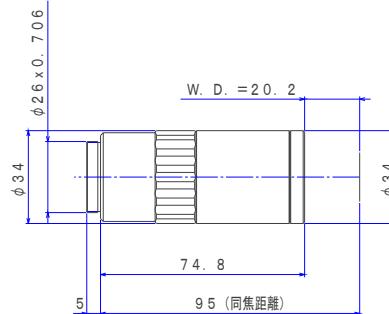


PAL-20-NIR-HR-LC00

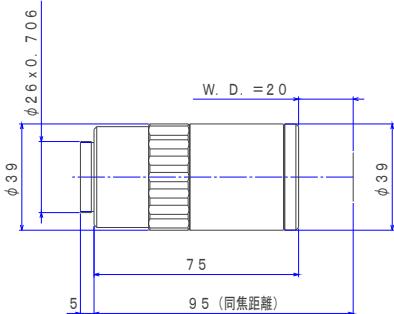

PAL-50-NIR-L

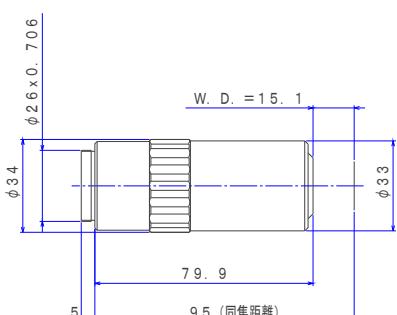

PAL-50-NIR-HR-LC00

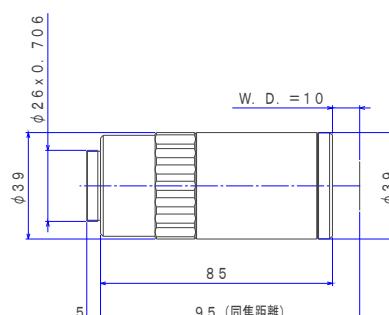

Part Number	Description	Magnification	Focal length f [mm]	N.A.	Working distance (W.D.) [mm]	Resolution [μm]	Focal depth ±D.F [μm]	Real field of View		Weight [kg]
								(Eyepiece φ24mm) [mm]	(1/2"CCD) [mm]	
PAL-10-NIR	MPlanApo NIR 10x	10x	20	0.3	31.0	0.92	3.1	φ2.4	0.48×0.64	0.3
PAL-20-NIR-LC00	MPlanApo NIR 20x	20x	10	0.4	20.2	0.69	1.7	φ1.2	0.24×0.32	0.36
PAL-20-NIR-HR-LC00	MPlanApo NIR HR 20x	20x	10	0.45	20.0	0.61	1.4	φ1.2	0.24×0.32	0.42
PAL-50-NIR-L	MPlanApo NIR 50x	50x	4	0.45	15.1	0.61	1.4	φ0.48	0.10×0.13	0.34
PAL-50-NIR-HR-LC00	MPlanApo NIR HR 50x	50x	4	0.67	10	0.41	0.61	φ0.48	0.10×0.13	0.48


※Resolution and focal depth are calculated value at wavelength of 0.55μm.

# Near Infrared Objective Lenses with Cover Glass thickness compensation (PAL-NIR-LC)




- Bright Field Inspection and Laser processing
- Infinity Corrected
- 1064nm
- Cover glass thickness compensation ( $t=0.7\text{mm}$  and  $1.1\text{mm}$ )
- Plan Apochromat
- Laser damage threshold (※)
- $0.1\text{ J/cm}^2$  (532nm),  $0.2\text{ J/cm}^2$  (1064 nm)

※Pulse width:10ns, Frequency:20Hz, reference value

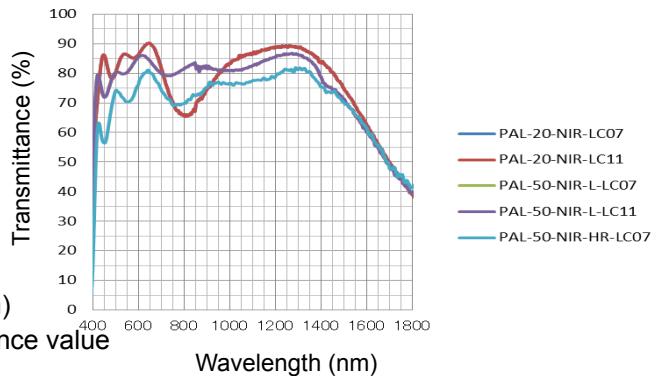


## Outline Drawing


PAL-20-NIR-LC07

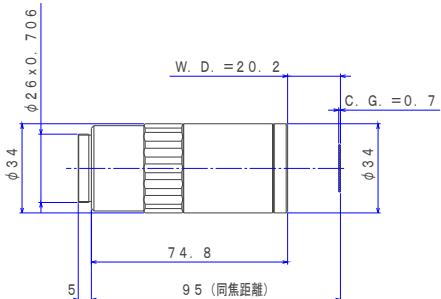


PAL-20-NIR-LC11

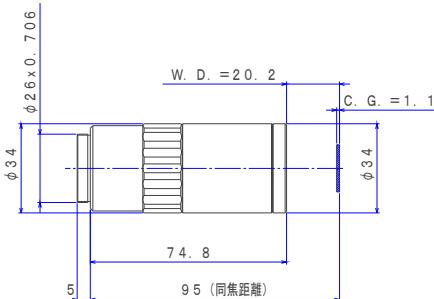


PAL-50-NIR-L-LC07

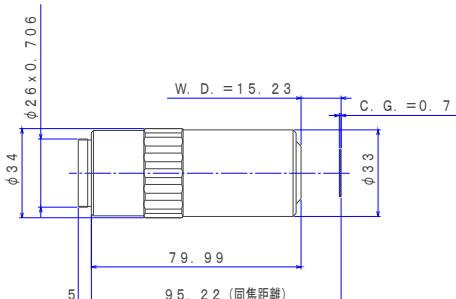

PAL-50-NIR-L-LC11

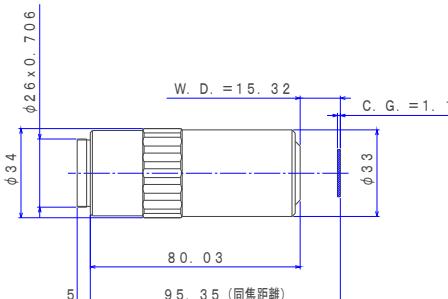

PAL-50-NIR-HR-LC07

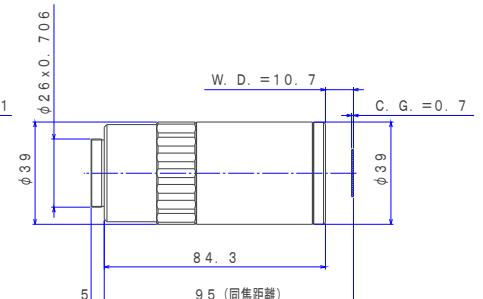

Part Number	Description	Mag nific atio n	Focal length f [mm]	N.A.	Worki ng distan ce (W.D.) [mm]	Resolutio n [μm]	Focal depth ±D.F [μm]	Real field of View		Weight [kg]
								(Eyepiece φ24mm) [mm]	(1/2"CCD) [mm]	
PAL-20-NIR-LC07	LCD MPlanApo NIR 20x(t0.7)	20×	10	0.4	19.98	0.69	1.7	φ1.7	0.24×0.32	0.36
PAL-20-NIR-LC11	LCD MPlanApo NIR 20x(t1.1)	20×	10	0.4	19.85	0.69	1.7	φ1.7	0.24×0.32	0.36
PAL-50-NIR-L-LC07	LCD MPlanApo NIR 50x(t0.7)	50×	4	0.45	15.01	0.61	1.4	φ0.46	0.10×0.13	0.34
PAL-50-NIR-L-LC11	LCD MPlanApo NIR 50x(t1.1)	50×	4	0.45	14.97	0.61	1.4	φ0.46	0.10×0.13	0.34
PAL-50-NIR-HR-LC07	LCD MPlanApo NIR HR 50x(t0.7)	50×	4	0.67	10.48	0.41	0.61	φ0.46	0.10×0.13	0.48

※Resolution and focal depth are calculated value at wavelength of 0.55μm.


※Working distance: value at air

# Ultra-violet Objective Lenses (PFL-UV / NUV-AG)




- Bright Field Inspection and Laser processing
- Infinity Corrected
- 266nm, 355nm and 532nm
- Higher Laser damage threshold with Air-gap design
- Laser damage threshold (※)  
0.09 J/cm<sup>2</sup> (266nm)  
0.1J/cm<sup>2</sup> (355nm)  
0.2 J/cm<sup>2</sup> (532nm)

※Pulse width:10ns, Frequency:20Hz , reference value

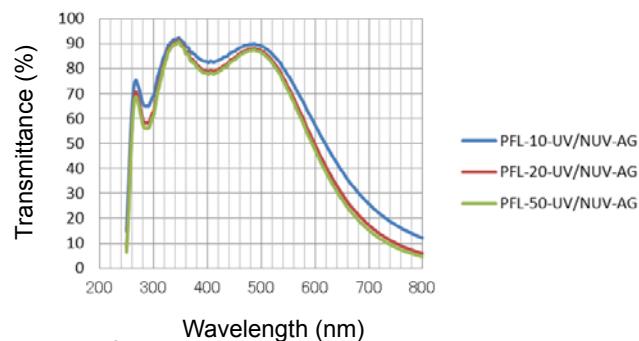


## Outline Drawing


PFL-10-UV/NUV-AG

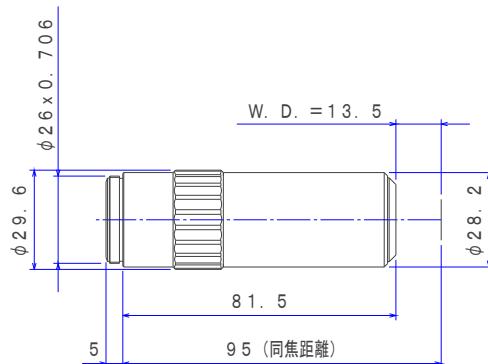

PFL-20-UV/NUV-AG-A

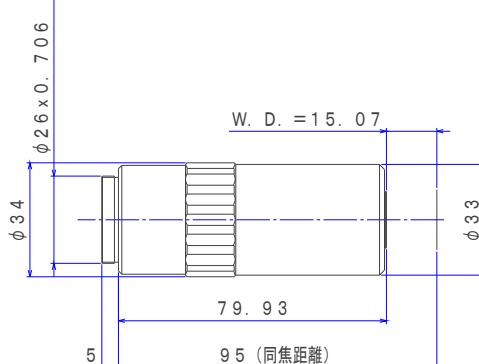

PFL-50-UV/NUV-AG-A

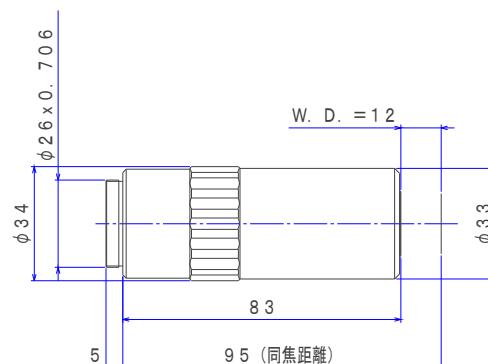

Part Number	Description	Mag nific atio n	Focal lengt h f [mm]	N.A.	Working distance (W.D.) [mm]	Resolu tion [ $\mu\text{m}$ ]	Focal depth $\pm\text{D.F.}$ [ $\mu\text{m}$ ]	Real field of View		Weig ht [kg]
								(Eyepiece $\phi 24\text{mm}$ ) [mm]	(1/2"CCD) [mm]	
PFL-10-UV/NUV-AG	MPlan UV/NUV 10x	10x	20	0.2	13.5	1.4	6.9	φ2.4	0.48x0.64	0.3
PFL-20-UV/NUV-AG-A	MPlan UV/NUV 20x	10x	10	0.36	15.07	0.76	2.1	φ1.2	0.24x0.32	0.35
PFL-50-UV/NUV-AG-A	MPlan UV/NUV 50x	50x	4	0.42	12	0.65	1.6	φ0.48	0.10x0.13	0.41


※Resolution and focal depth are calculated value at wavelength of 0.55μm.

# Near Infrared Objective Lenses with Cover Glass thickness compensation (PAL-NIR(780))




- Bright Field Inspection and Laser processing
- Infinity Corrected
- Plan Apochromat
- Laser damage threshold (※)
  - 0.1 J/cm<sup>2</sup> (532nm)
  - 0.15 J/cm<sup>2</sup> (780nm)

※Pulse width:10ns, Frequency:20Hz, reference value

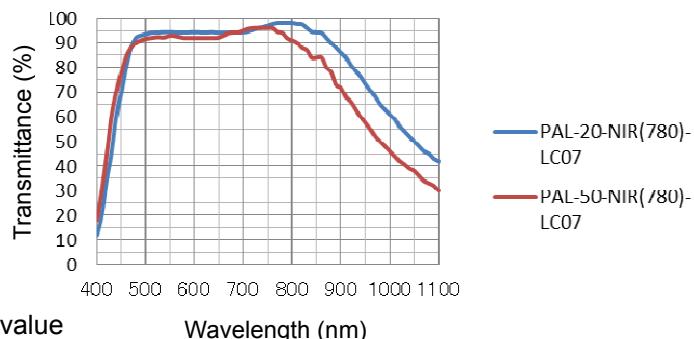


## Outline Drawing

PAL-20-NIR(780)-LC07

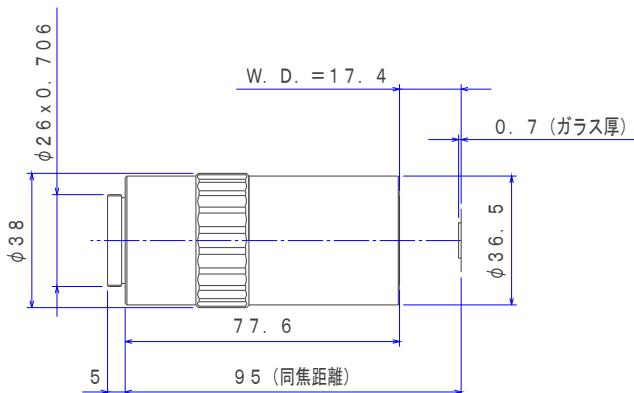

PAL-50-NIR(780)-LC07

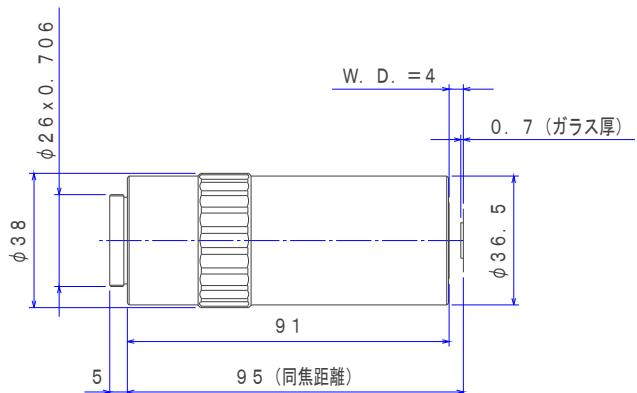

Part Number	Description	Magnification	Focal length f [mm]	N.A.	Working distance (W.D.) [mm]	Resolution [μm]	Focal depth ±D.F [μm]	Real field of View		Weight [kg]
								(Eyepiece φ24mm) [mm]	(1/2"CCD) [mm]	
PAL-20-NIR(780)-LC07	LCD MPlanApo NIR(780) 20x(t0.7)	20x	10	0.45	17.2	0.6	1.4	φ1.2	0.24x0.32	0.34
PAL-50-NIR(780)-LC07	LCD MPlanApo NIR(780) 50x(t0.7)	50x	4	0.8	3.8	0.3	0.4	φ0.48	0.10x0.13	0.44

※Resolution and focal depth are calculated value at wavelength of 0.55μm.

※Working distance: value at air

<http://www.global-optosigma.com/>

## SIGMAKOKI Group



5F, SIGMAKOKI Tokyo Head office 1-19-9, Midori, Sumida-ku,  
Tokyo, 130-0021, JAPAN  
TEL. +81-3-5638-8228  
FAX.+81-3-5638-6550



**OptoSigma Corporation**  
3210 S.Croddy Way, Santa Ana, California 92704 USA  
TEL. +1-949-851-5881  
FAX.+1-949-851-5058



**OptoSigma Europe S.A.S.**  
6 Avenue des Andes, 91940 Les Ulis, Essonne, FRANCE  
TEL. +33-1-6918-1700  
FAX.+33-1-6010-0929