


**DELO**



*Versatile bonding options in electric motors*



**Adhesives  
for E-Motors**

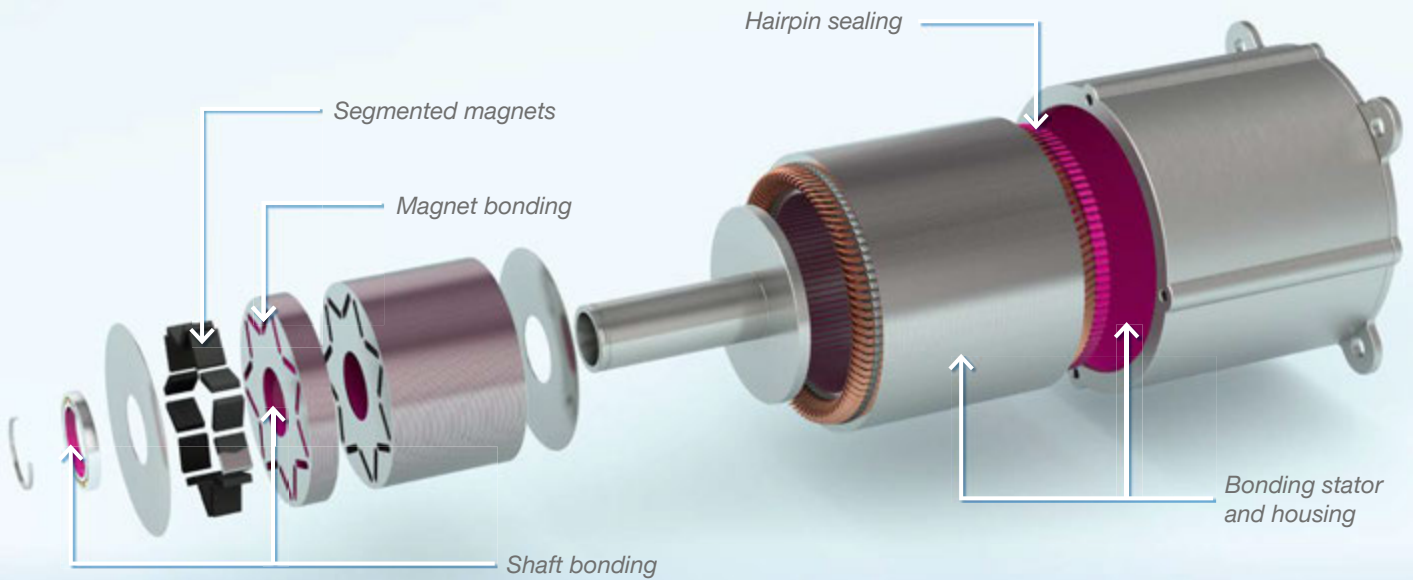

# Adhesives for Electric Motors

Electric motors are becoming ever smaller and more powerful, while at the same time their efficiency is expected to increase. At some stages, established joining techniques face various challenges, both with regard to the motor itself and to its production process. The high-tech adhesives developed by DELO especially for electric motors help you solve these challenges. They feature gap-filling and tension-equalizing properties and

offer maximum strength as well as resistance to temperature, media, and impact. They also enable efficient production processes that are flexible and scalable, especially with dual curing. Contact us and benefit from our diverse and powerful product range! Let our experts help you find the solution that best suits your motor and its application.



**VIDEOS ON BONDING OF ELECTRIC MOTORS**


[www.youtube.com/DELOadhesives](http://www.youtube.com/DELOadhesives)



Discuss your project and your requirements with our experts:

[e-motor-experts@DELO.de](mailto:e-motor-experts@DELO.de)

## DELO adhesives for electric motor applications

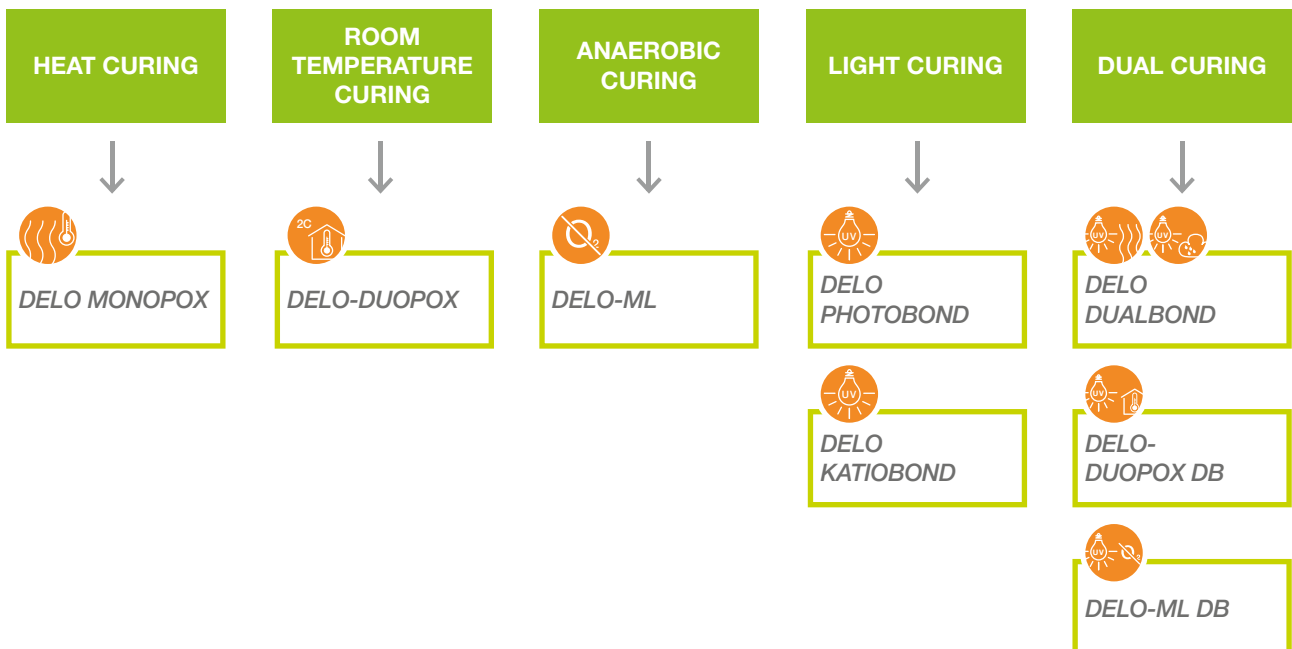





Considering the numerous advantages bonding offers over mechanical anchoring or bandaging, more and more motor manufacturers are opting for bonding

magnets (usually ferrite or rare earth magnets) into housings (e.g. made of steel) or electrical lamination stacks.

## IPM bonding for the automotive industry



Properties of DELO adhesives	Your benefits
<ul style="list-style-type: none"> <li>Light fixation within seconds (&lt; 10 s) Curing at room temperature</li> </ul>	Fast and automated process; large components do not need to be heated
<ul style="list-style-type: none"> <li>Very good flowability</li> <li>Damping effect</li> </ul>	Improved functionality: Reliable protection of components against corrosion and vibrations; acoustic improvement
<ul style="list-style-type: none"> <li>High temperature stability up to +220 °C</li> <li>Very high media resistance</li> </ul>	Reliable function of components even at maximum operating temperatures and in contact with cooling liquid or oil
<ul style="list-style-type: none"> <li>Tension-equalizing</li> <li>Impact-resistant</li> </ul>	Reliable function throughout the components' lifetime even under the most demanding conditions
<ul style="list-style-type: none"> <li>Good gap-filling properties</li> </ul>	Larger manufacturing tolerances for magnets and lamination stacks

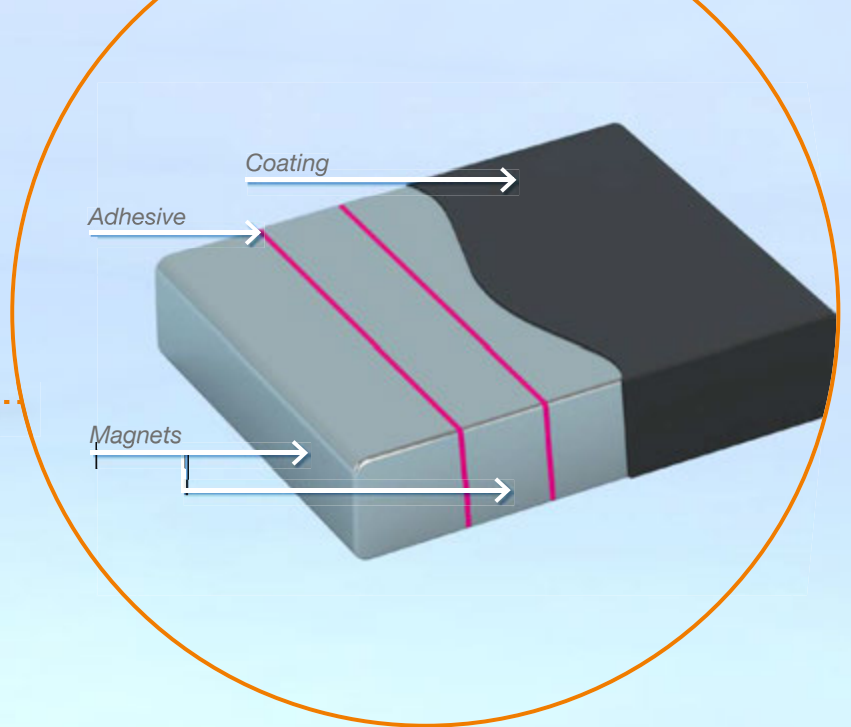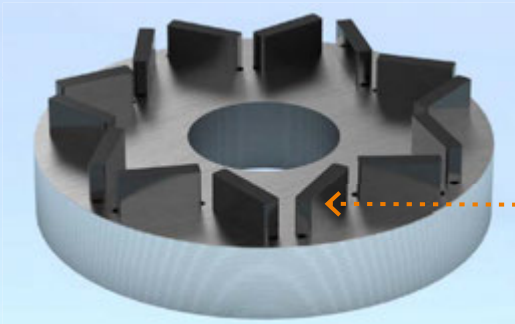


# Segmented Magnets

Segmented (“stacked”) magnets – for example, neodymium magnets – are used in electric motors to reduce eddy currents. The resulting lower heat development in the magnets leads to higher efficiency.


Such applications are mainly found in the automotive sector where it is essential to achieve the best possible performance in the smallest installation space.

## Magnet stacking

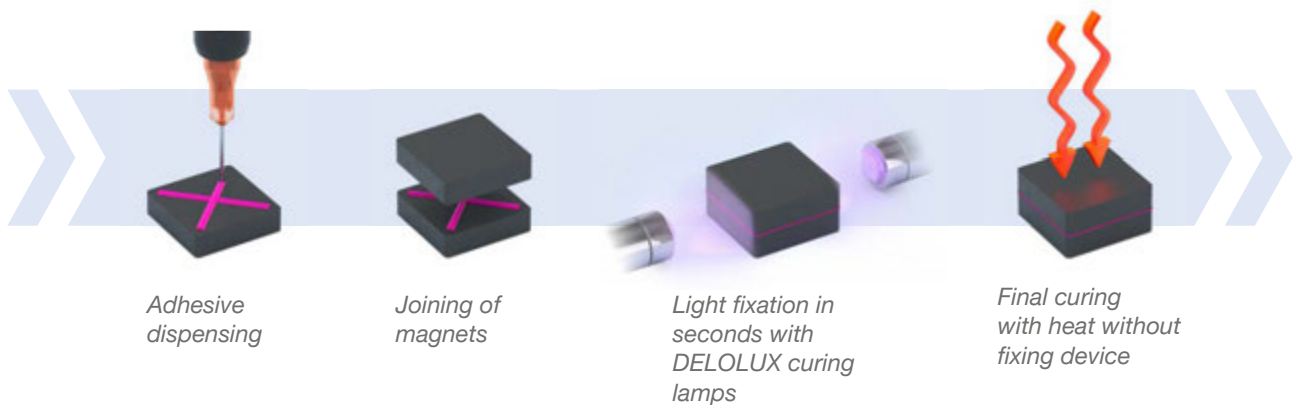

Properties of DELO adhesives	Your benefits
<ul style="list-style-type: none"> <li>▪ Special filler</li> </ul>	Defined layer thicknesses can be produced (e.g. 50 µm)
<ul style="list-style-type: none"> <li>▪ Electrically insulating</li> </ul>	Reduction of eddy current losses within the magnets
<ul style="list-style-type: none"> <li>▪ Very high temperature stability up to +220 °C</li> </ul>	Improved functionality: Reliable protection of components during continuous operation at high temperatures
<ul style="list-style-type: none"> <li>▪ Light fixation within seconds as an option</li> </ul>	Rapid further processing without additional fixing devices; short cycle times

Stator bonded to its housing in a brushless DC motor  
© ebm-papst

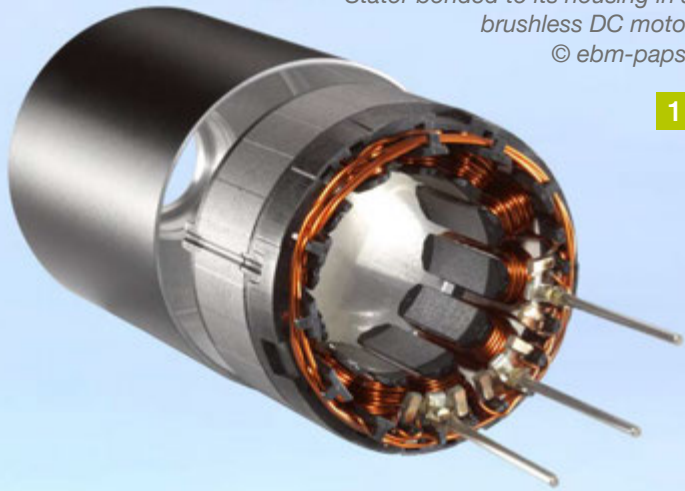

1

Bonding a collector to a shaft  
© metabo



2

# Stator-to-housing Bonding, Shaft Bonding

**1** Bonding stator to housing: Stators made of electrical sheet are often bonded into their housings (e.g. from cast aluminum or cast magnesium), since even in this

application, bonding has some advantages over conventional joining methods such as pressing or shrinking.

Properties of DELO adhesives	Your benefits
<ul style="list-style-type: none"> <li>High temperature stability up to +200 °C</li> <li>Damping effect of the adhesive</li> </ul>	Improved functionality: Reliable protection of components against high temperatures and vibrations; acoustic improvement
<ul style="list-style-type: none"> <li>Good gap-filling properties</li> </ul>	Larger manufacturing tolerances are possible
<ul style="list-style-type: none"> <li>Equalization of tensions between stator and housing with different CTEs</li> </ul>	Different materials of stator and associated housing can be combined; reliable connection over the entire service temperature range
<ul style="list-style-type: none"> <li>Curing at room temperature</li> </ul>	No heating up required; efficient production
<ul style="list-style-type: none"> <li>Fast fixation by light or solvent-free activator</li> </ul>	Fast, automated process


**2** Shaft bonding: For a long time, force-closed or form-closed joining techniques such as shrinking were used for shafts. Now, adhesives are also used in this field, since they not only prevent play and slip, but also

protect against fretting or contact corrosion. Anaerobic-curing, low-viscous adhesives are preferred here, as the joining gap is smaller due to the given dimensions of shaft and hub.

Properties of DELO adhesives	Your benefits
<ul style="list-style-type: none"> <li>Very high temperature stability up to +220 °C</li> </ul>	High functionality even at high temperatures
<ul style="list-style-type: none"> <li>Curing at room temperature</li> </ul>	Efficient production
<ul style="list-style-type: none"> <li>Fast fixation by light or solvent-free activator</li> </ul>	Fast, automated process




Motor for power tools

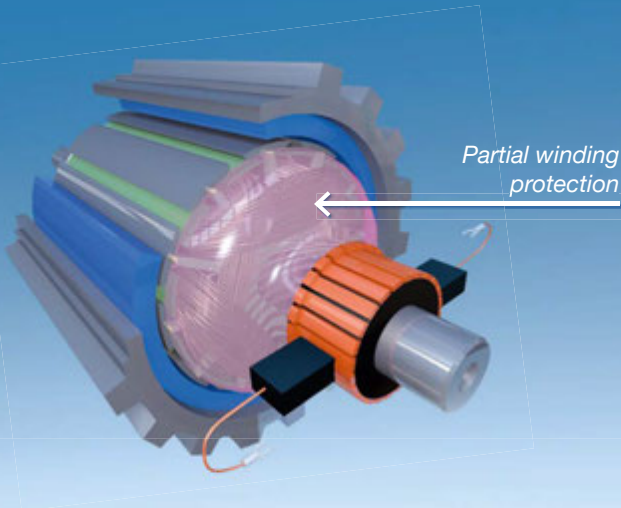

Protection of the stator windings

Contact protection

Stator of a drive module for automobiles

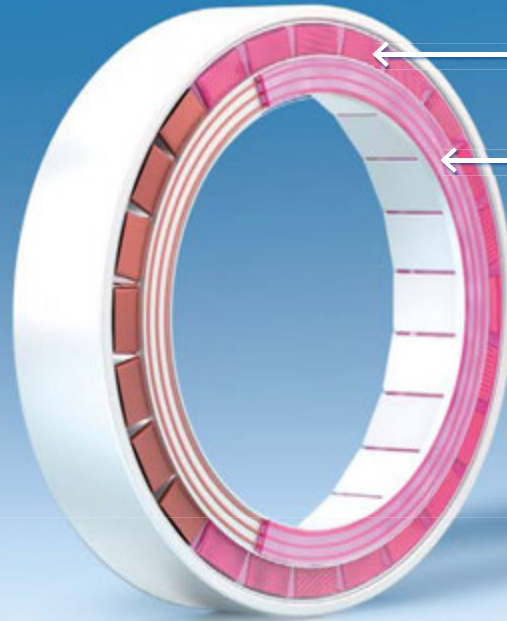

# Potting & Covering


Sensitive motor components often have to be protected against humidity, media, or mechanical load. This is best achieved with potting compounds. The highly reliable potting compounds from DELO are used especially in the automotive sector to meet the demanding requirements of this industry.

Possible applications:

- Protecting the (enameled) copper coil wire against vibrations
- Covering solder contacts/welding contacts to protect them from corrosion
- Partial winding protection against abrasive media
- Stator potting
- Hairpin sealing

Properties of DELO adhesives	Your benefits
<ul style="list-style-type: none"> <li>▪ Excellent resistance to aggressive media (e. g. ATF)</li> </ul>	Reliable function throughout the components' lifetime
<ul style="list-style-type: none"> <li>▪ Excellent temperature resistance while providing low thermal expansion</li> </ul>	Minimized stresses between potting compound and component ensure the component's reliability over its entire lifetime
<ul style="list-style-type: none"> <li>▪ Low viscosity</li> </ul>	Optimum flow also between and behind component parts
<ul style="list-style-type: none"> <li>▪ Thermal conductivity in combination with optimal flow behavior</li> </ul>	Improved heat dissipation in the electric motor
<ul style="list-style-type: none"> <li>▪ Fluorescent product variants available</li> </ul>	Easy optical application and process control
<ul style="list-style-type: none"> <li>▪ Very fast light fixation and curing when fixing and covering components Fast heat curing</li> </ul>	Short cycle times (light fixation within seconds, heat curing e. g. in only 20 min at +150 °C)

Using DELO-DOT for fast and precise dispensing of balancing material onto a fan impeller

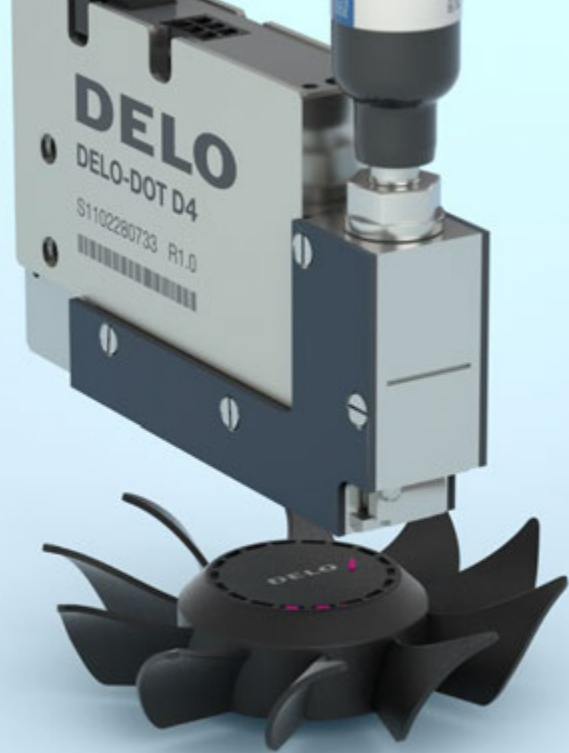


# Additive Balancing

Balancing is essential in most applications involving rotating components to reduce vibration and extend service life. For this purpose, mass is added or removed at precisely calculated points. Compared to the conventional methods of removing material by machining

or using balancing putty to add mass, additive balancing with highly filled, light-curing DELO materials offers several advantages. The scalable process is also suitable for the slightest imbalances.

## Balancing process with light-curing DELO materials

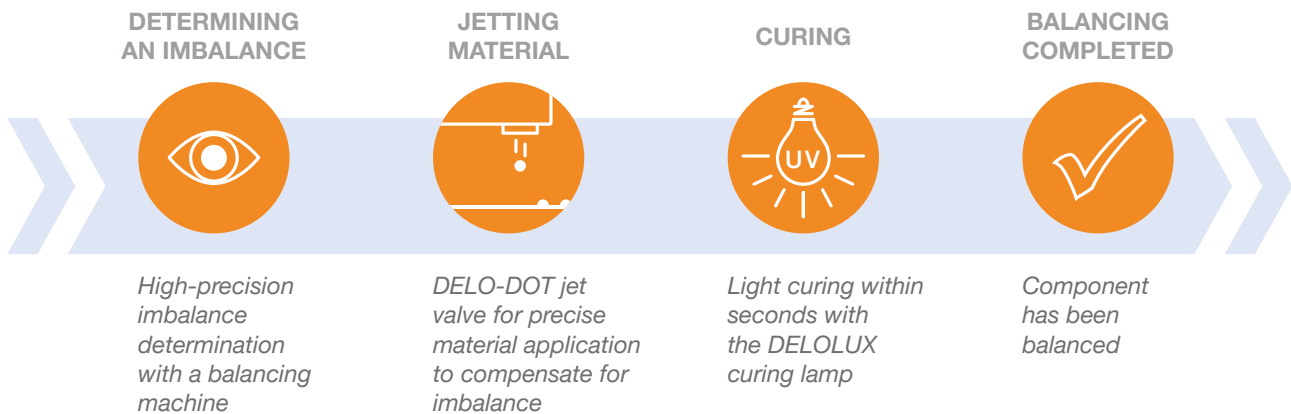

Properties of DELO materials	Your benefits
<ul style="list-style-type: none"> <li>Fast and precise dispensing with the DELO-DOT jet valve</li> <li>Light curing within seconds &lt; 10 s</li> </ul>	Fast, automated process
<ul style="list-style-type: none"> <li>One-component liquid material</li> </ul>	No need for initial sacrificial material; no mixing required; chip-free balancing saves the disposal of removed material (cleaning)
<ul style="list-style-type: none"> <li>High density</li> </ul>	The required mass per drop of material takes up only little volume; no additional weights are necessary
<ul style="list-style-type: none"> <li>Minimum possible correction accuracy of 0.1 mg</li> </ul>	Highest precision (residual imbalance of 0.001 g·mm)
<ul style="list-style-type: none"> <li>Good adhesion to plastic (e.g. PA, PBT) and metal</li> <li>Good media resistance</li> </ul>	Reliable function throughout a component's lifetime



# CONTACT

**DELO** Industrial Adhesives  
Headquarters

► **Germany** · Windach / Munich .....



- **China** · Shanghai
- **Japan** · Yokohama
- **Malaysia** · Kuala Lumpur
- **Singapore**
- **South Korea** · Seoul
- **Taiwan, China** · Taipei
- **Thailand** · Bangkok
- **USA** · Sudbury, MA

..... [www.DELO-adhesives.com](http://www.DELO-adhesives.com)

The data and information provided are based on tests performed under laboratory conditions. Reliable information about the behavior of the product under practical conditions and its suitability for a specific purpose cannot be concluded from this. It is the customer's responsibility to test the suitability of a product for the intended purpose by considering all specific requirements and by applying standards the customer deems suitable (e.g. DIN 2304-1). Type, physical and chemical properties of the materials to be processed with the product, as well as all actual influences occurring during transport, storage, processing and use, may cause deviations in the behavior of the product compared to its behavior under laboratory conditions. All data provided are typical average values or uniquely determined parameters measured under laboratory conditions. The data and information provided are therefore no guarantee for specific product properties or the suitability of the product for a specific purpose. Nothing contained herein shall be construed to indicate the non-existence of any relevant patents or to constitute a permission, encouragement or recommendation to practice any development covered by any patents, without permission of the owner of this patent. All products provided by DELO are subject to DELO's General Terms of Business. Verbal ancillary agreements are deemed not to exist.

© DELO – This brochure including any and all parts is protected by copyright. Any use not expressly permitted by the Urheberrechtsgesetz (German Copyright Act) shall require DELO's written consent. This shall apply without limitation to reproductions, duplications, disseminations, adaptations, translations and microfilms as well as to the recording, processing, duplication and/or dissemination by electronic means. 10/20

ADHESIVES

DISPENSING

CURING

CONSULTING

**DELO**